

## Manual:Extension/BlueSpiceChecklist

### Contents


1	What is BlueSpiceChecklist? .....	2
2	Using BlueSpiceChecklist .....	2
2.1	Defining lists .....	2
3	CheckList Functions .....	2
4	Create Checkboxes .....	3
5	Creating Lists .....	5
5.1	Assign colors .....	6
6	Authorisation .....	7
7	CheckList-Tag Paramaters .....	7
8	Classic MediaWiki .....	8
9	See also .....	8

## What is BlueSpiceChecklist?

**BlueSpiceChecklist** enabled inserting checkboxes and comboboxes to the page. These can be changed without the need to edit the page.

## Using BlueSpiceChecklist


Checklist items can be inserted from "Insert" menu, by clicking on "Insert magic" button, while editing the page. In the list of tags available, choose "checklist" and click "Done".

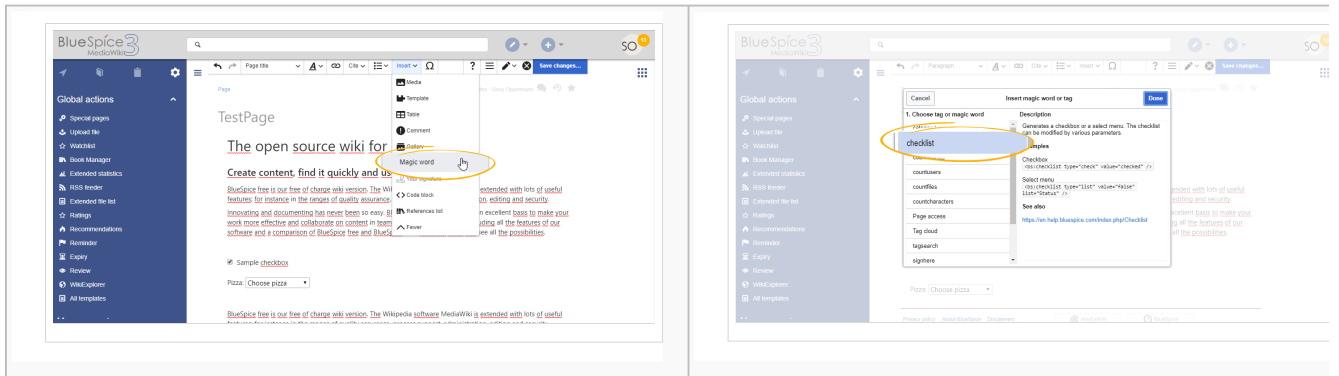

Checkbox will be inserted to page and, below it, a configuration panel will appear.

Here user can choose one of two tabs:

- Checkbox - only configuration for checkbox is marking it as selected or not selected
- List - for lists (combobox), a predefined list of options as well as current status can be selected.

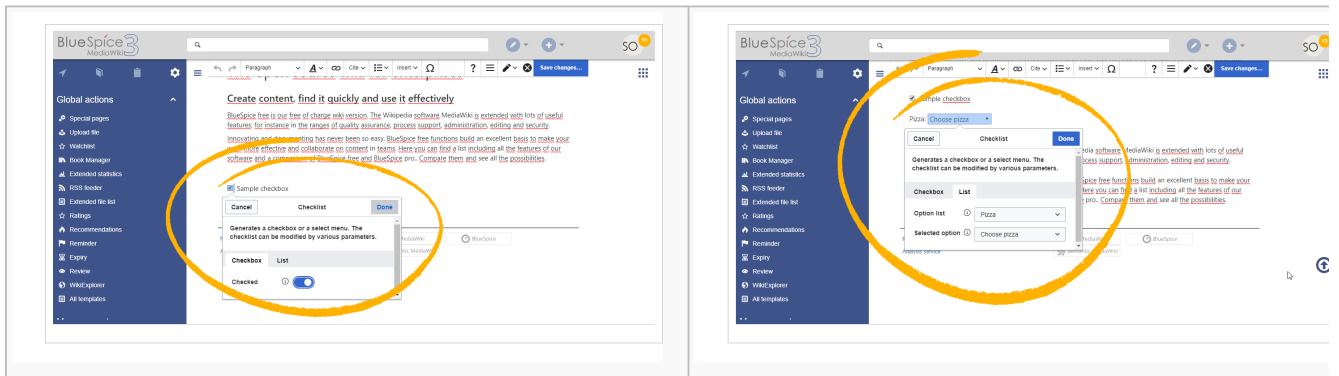

## Defining lists

## CheckList Functions


The checklist dropdown inserts:

- Recently used lists.
- Single checkbox elements.
- Newly created lists.

Multiple checkboxes and/or checklists can be inserted into an article.



# Create Checkboxes


**Insert Checklist** : A checkbox is a single checkbox element. You insert a checkbox by clicking the

Menu Icon 

or the 'Checklist elements' dropdown item. Ticking the checkbox in view mode alternates the checkbox hook between false and checked and updates the article's version history, edit mode doesn't update the history.

**Wikicode:** The Code Editor (i.e. not the WYSIWYG Editor) edits checklist tags. i.e. the `value=""` unchecked states table below or the color hex codes further below.

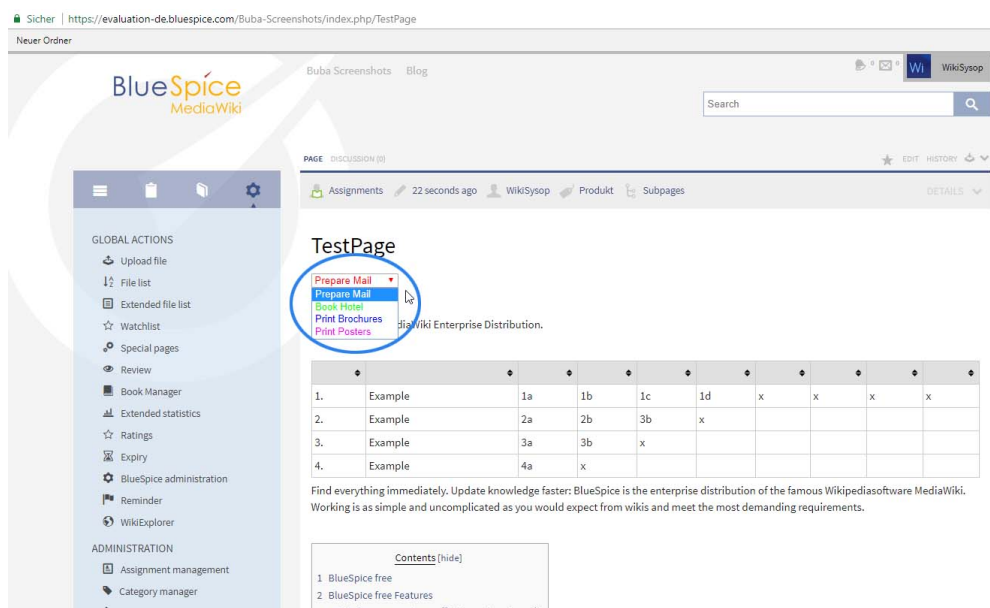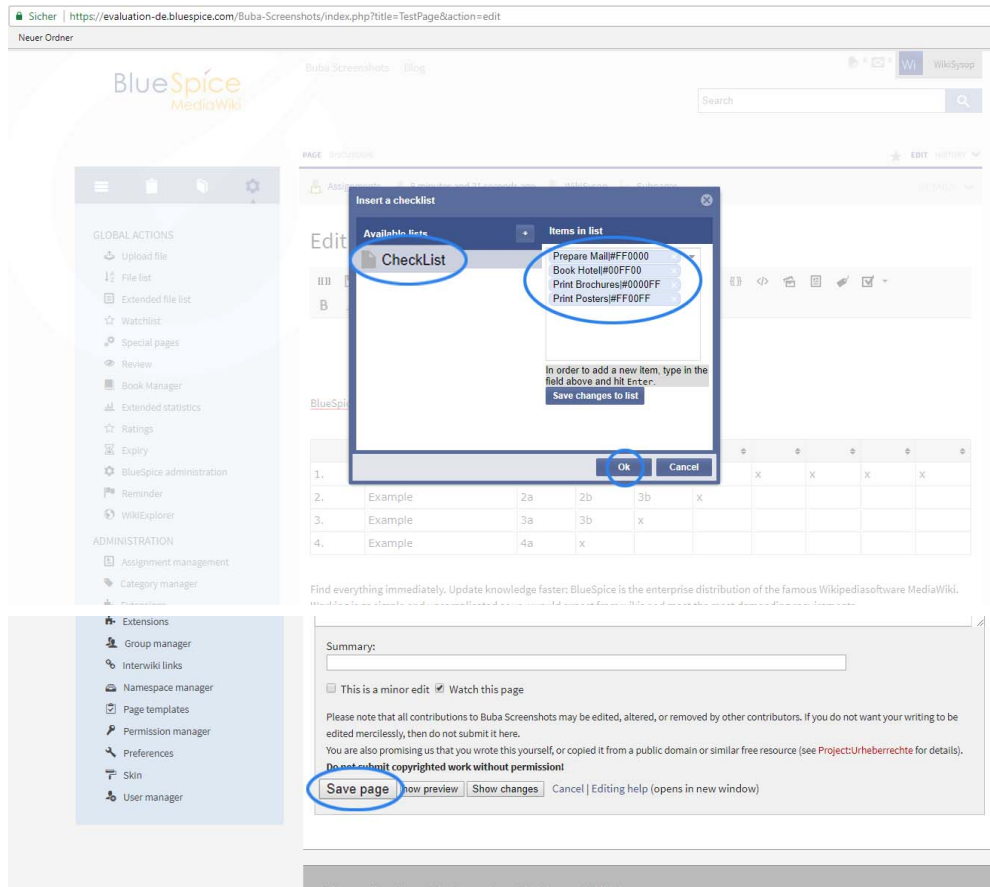


Clicking the  inserts only. You need to add the Prepare Mail identifier.

```
<bs:checklist value="" /> Prepare Mail  
<bs:checklist value="false" /> Book Hotel
```

## Creating Lists

**Prepare Checklist** : In order to insert a checklist in an article, you must first create a checklist template that contains the necessary check list elements. This is done by creating a new article in the Template namespace. For example create a new article named 'Template:Status'. Then in the Code Editor (i.e. not the WYSIWYG Editor) add the check list items as exemplified above, *as a list*. Save the Template and remember the Template's name as you need to add this name to Insert list dialogue below.

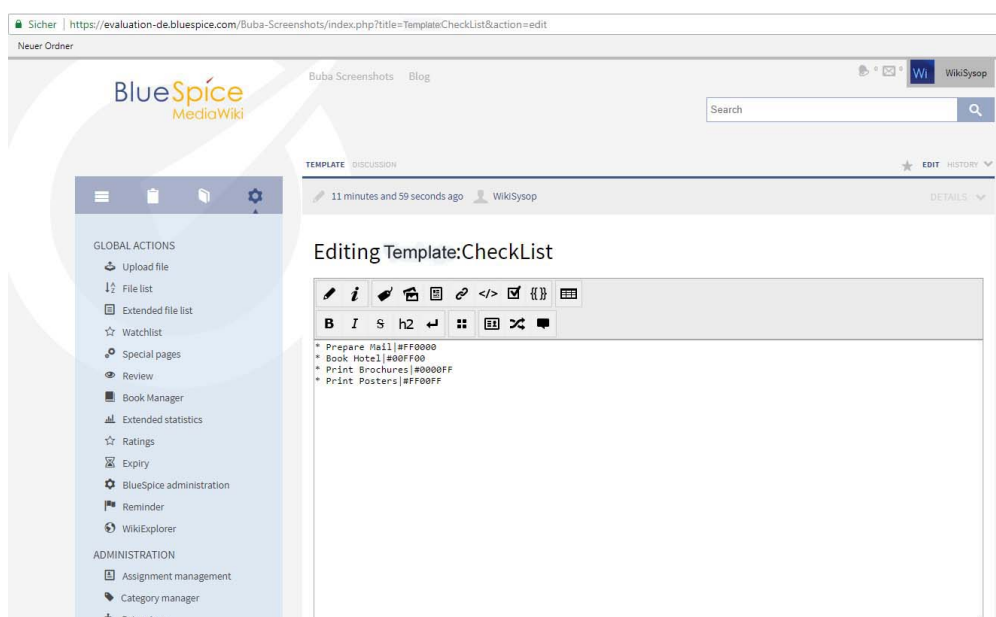

**Assign colors** : To facilitate visibility, you can assign list element








colors. This is done by entering the pipe symbol ( straight line ) after the item identifier followed by a HEX color code.

```
* Prepare Mail| #FF9900
* Book Hotel| #00FF00
```

## Assign colors

To support element status visibility color codes can be linked to the list elements. This is done by adding the pipe symbol (straight line) after the list element name followed by the HEX color Code.


### Typical colors;

Colour	Name	HEX-Code
	black	#000000
	grey	#888888
	red	#FF0000
	orange	#FF8800
	green	#00FF00
	blue	#0000FF
	magenta	#FF00FF


**Insert checklist** : The WYSIWYG Editor checklist dropdown arrow



enables you to insert checklists into your articles. You simply click a previously used template or as in this case add a new checklist.

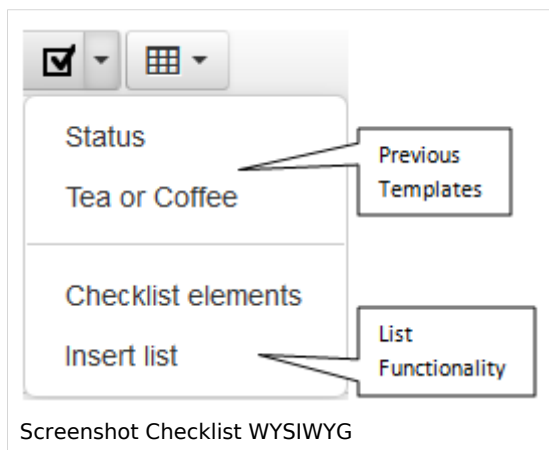

To insert a new checklist, select the Insert list item in the dropdown. Then in the popup click on the + sign to add a new template. You must now enter the exact template title created above. Clicking " Ok " inserts the template's checklist items into your current article.

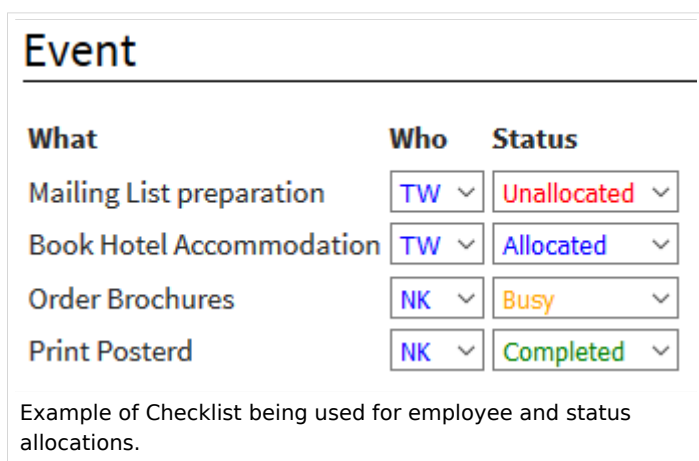

As an example, you can add in multiple table row lists to show a tasks status of tasks , this might look like this.

## Authorisation

- Anyone who has write permissions can use the Checklist tag.
- Anyone who has the checklistmodify permission can modify a checklist.

Designation	Description	Standard group
<i>checklistmodify</i>	Allows you to change a checklist item	user

## CheckList-Tag Paramaters

You can of course also use Wikicode to insert check boxes and checklists. A Checklist-Tag creates a single form field, which depending on the mode is a checkbox or select box. It has the following parameters:

Name	Description	Type / Value range	Default value
<i>type</i>	Modus: If the checklist item as a list or as	check, list	check
<i>value</i>	Current value	str	-
	Contains the name of the page in the MediaWiki namespace of the list		

Name	Description	Type / Value range	Default value
<i>list</i>	entries. Mandatory when type is 'list'	str	-
<i>id</i>	Optional indication of ID that can be used to identify the items	str	-

## Classic MediaWiki

---

Classic MediaWiki does not provide checklist functionality.

## See also

---

Our [reference page](#).