

Setup:Installation Guide/System Preparation/Windows/Node.js

Contents

1	Downloading Node.js	2
2	Installing Node.js	3
3	Adjusting the Installation path of the Node.js packages	5
4	Installing the Windows Build Tools	6
5	Next step	8



Ð

Node.js is required for the operation of the rendering service "Parsoid" for the Visual Editor. The steps listed here are optional and only required if you plan to use them in your BlueSpice installation.

Downloading Node.js

In Internet Explorer, open the official website of Node.js (1). Download the latest LTS version 10.x (2).

- □ × 会 ② ● https://nodejs.org (on/) ♪ - 曲 む ● Nodejs × ○ ♪ - 曲 む ● Nodejs ×
HOME ABOUT DOWNLOADS DOCS GETINVOLVED SECURITY NEWS FOUNDATION
Node.js [®] is a JavaScript runtime built on Chrome's V8 JavaScript engine.
Download for Windows (x64)
10.13.0 LTS Recommended for Most Users Other Downloads Changelog API Docs
Or have a look at the Long Term Support (LTS) schedule.
Sign up for Node.js Everywhere, the official Node.js Monthly Newsletter.
LINUX FOUNDATION COLLABORATIVE PROJECTS Report Node is issue Report website issue Get Help
© Node. is Foundation. All Rights Reserved. Portions of this site originally © Joyent.
Node, is is a trademark of Joyent, Inc. and is used with its permission. Please review the Trademark Guidelines of the Node is Foundation. Linux Foundation is a registered trademark of The Linux Foundation.

Follow the further download instructions and download the installation package to your hard drive.



Please note that the download on your Windows Server with Internet Explorer only works if you have configured the Internet Explorer Advanced Security Settings in the Server Manager. Please refer to the technical documentation from Microsoft.




Tis guide uses the Node.js version 10.13.0 as an example. You can download the latest Nodee. js version tat the time of installation.



Installing Node.js

Open the downloaded file "node-v10.13.0-x64.msi".

Start the installation by clicking "Next>":

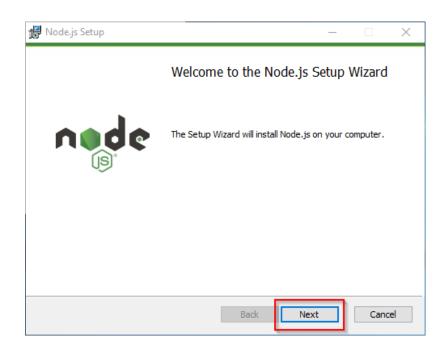

Confirm the license (1) and click "Next >" (2):




Confirm the further installation steps by clicking "Next >":




Destination Folder Choose a custom location or click Next to install.	nede	Custom Setup Select the way you want features to be installed.	nede	Tools for Native Modules Optionally install the tools necessary to comple native modules.	ned
bratial Node ja to: [::]thogram Pfeirtoodopi, Orange		Click the same in the tree below is during the way 	(Fatures will be installed. Install the core floods jo runtime floods and). This faulture requires 2040 an your hard direct, it think 2 of 2 substatures soletics. The substatures accels 2000 an your hard direct.	Some reprincible reset to be complet from CC+++ viter installs to rest 4.5 ⁺ models, some stok (Pyrkon 2 and Visual Rudo B matikation and the conservery tasks. Into the tit was a constrained on the conservery tasks. Into the tit was a description of the conservery tasks. The total is and the conservery tasks in the tit was description of the conservery tasks. The total is and the conservery tasks in the tit was description of the conservery tasks. The total is and the conservery tasks in the total total conservery description. The total is and the conservery tasks in the conservery description. The constraints are a subsective description of the conservery description. The constraints are a subsective description of the conservery to the constraints and the description of the conservery tasks. The constraints are description of the conservery tasks are as well as the tit of the conservery tasks and the description of the conservery tasks. The constraints are the constraints are as a subsective task and the description of the constraints are as a subsective the transmission of the conservery tasks are associated and the description of the conservery tasks are the constraints are associated and the conservery tasks are the constraints are the constraints are the constraints are the constraints are the constraint are the constraints are the constraints are the constraints are the constraints are the constraints are the constraints are the constraints are	uid Took) need to be so install Boxstarter an installation completes.
Back Next	Cancel	Reset Disk Usage	Back Next Corol	Teck	Next Can

Start the installation by clicking "Install":

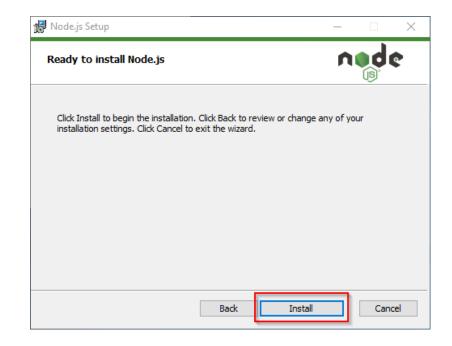

You can close the setup program after finishing the installation:



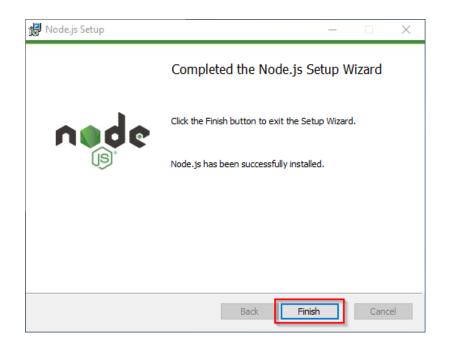

Adjusting the Installation path of the Node.js packages

By default, Node.js installs its packages in the profile directory of the logged-in user. Since Node. js is intended solely to operate as a user-independent server application under BlueSpice, it is strongly recommended that you change the default path for these packages:

In the Node.js installation folder, open the file node_modules\npm\npmrcin a text editor:

File Home Share	View		nom 1		[e] (e	~
- → × ↑ <mark></mark> → Th	is PC → Local Disk (C:) → Program File				ע פֿ Search	npm 🔎
🖈 Quick access	Name	Date modified	Туре	Size		
Desktop #	📙 bin	3/12/2019 5:02 AM	File folder			
	changelogs	3/12/2019 5:02 AM	File folder			
🕹 Downloads 🛛 🖈	doc doc	3/12/2019 5:02 AM	File folder			
👔 Documents 🛛 🖈	html	3/12/2019 5:02 AM	File folder			
📰 Pictures 🛛 🖈	📙 lib	3/12/2019 5:02 AM	File folder			
This PC	- man	3/12/2019 5:02 AM	File folder			
	node_modules	3/12/2019 5:02 AM	File folder			
3D Objects	scripts	3/12/2019 5:02 AM	File folder			
E Desktop	test .	3/12/2019 5:02 AM	File folder			
Documents	🛄 .mailmap	8/2/2018 4:56 PM	MAILMAP File	4 KB		
🕹 Downloads	.npmignore	8/3/2018 6:00 AM	NPMIGNORE File	1 KB		
Music	.travis.yml	3/5/2019 1:14 PM	YML File	2 KB		
Pictures	appveyor.yml	8/2/2018 4:56 PM	YML File	1 KB		
Videos	AUTHORS	3/5/2019 1:14 PM	File	23 KB		
	CHANGELOG.md	3/5/2019 1:14 PM	MD File	61 KB		
Local Disk (C:)	Configure	8/2/2018 4:56 PM	File	1 KB		
💣 Network	CONTRIBUTING.md	11/15/2018 10:29	MD File	5 KB		
	LICENSE	8/2/2018 4:56 PM	File	10 KB		
	💿 make.bat	8/2/2018 4:56 PM	Windows Batch File	1 KB		
	Makefile	8/2/2018 4:56 PM	File	6 KB		
	npmrc 2	8/2/2018 4:56 PM	File	1 KB		
	package.json	3/5/2019 1:14 PM	JSON File	8 KB		

Edit this file and enter the new default path for your Node.js packages:



*C:\Program Files\nodejs\node_modules\npm\npmrc - N	lotepad++ [Administrator]			_	_ ×
File Edit Search View Encoding Language Settings		lindow ?			
G 😅 🗄 🖻 🗟 😘 🚔 🕹 👘 🛍 🗇 🗲 🖷 🧯			1		
mpmge 🖂					
<pre>1 prefix=C:\bluespice\bin\npm</pre>					
2					


Save the file and close the editor.


{{Template:Hint|text=This documentation is based on the [[Setup:Installation Guide/Advanced /Windows_Folder_Structure | folder structure recommended by us]. For this reason, the default path for the Node.js packages is set to the folder C:\bluespice\bin\npm. If you have differnet requirements, you must adapt these paths accordingly.}}

Installing the Windows Build Tools


The Node.js package windows-build-tools is required for installing the relevant BlueSpice applications.

To install, first open the Windows command prompt as administrator. To do this, right-click "Start" (1) and select "Command Prompt (Administrator)" (2):



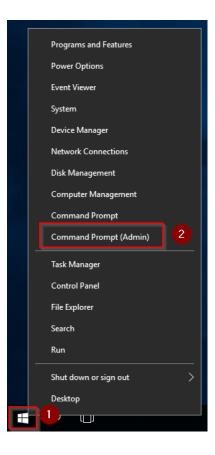

Execute the command "npm install --global --production windows-build-tools":

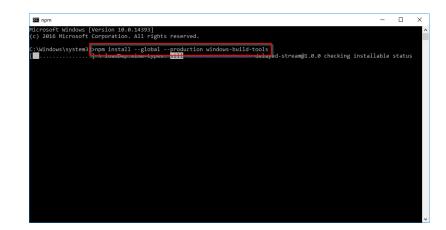




BlueSpice

This command may take a long time and not show any activity for a long time. However, it is still active and must not be canceled! Additionally, Windows Server may restart during the process without warning. In this case, restart the installation as described above.



After successful installation, you can close the command prompt:

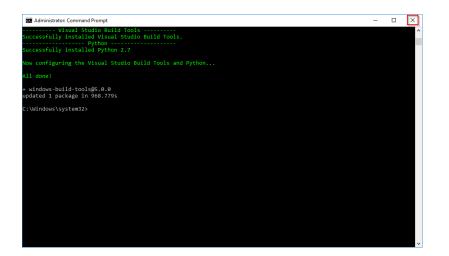

Next step

If you have completed all steps successfully, you can delete the previously downloaded file "nodev10.13.0-x64.msi" from your hard disk and continue to the next step " Parsoid".