

Setup:Installation Guide/System Preparation/Windows/Parsoid

A [quality version](#) of this page, [approved](#) on *13 September 2019*, was based off this revision.

Contents

1 Installing Parsoid	2
2 Creating the configuration file	3
3 Parsoid installation and configuration check	4
4 Installation as a service	4
5 Next step	8




Parsoid is the rendering service for the Visual Editor. The steps listed here are optional and only required if you want to use Visual Editor in your BlueSpice installation.



For the installation and operation of Parsoid, [Git](#) and [Node.js](#) are required. If you have not installed them yet, follow the links that are provided here.

Installing Parsoid

First, open the Windows Command Prompt as administrator. To do this, right-click "Start" (1) and select "Command Prompt (Administrator)" (2):

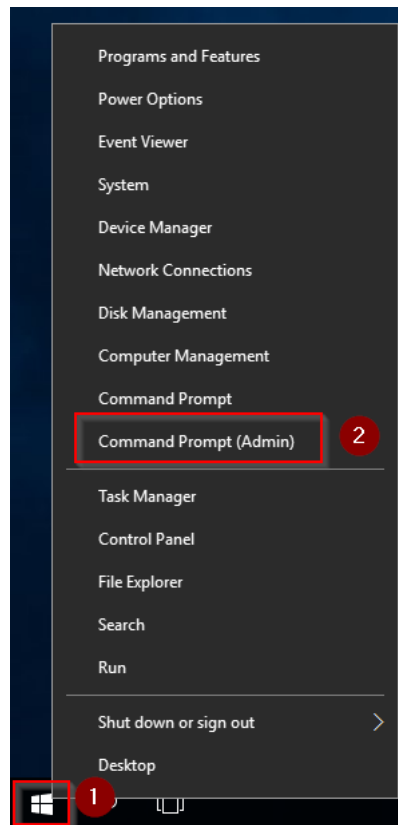

Change into the directory `C:\bluespice\bin\npm` (1) execute the command `"npm install parsoid"` (2):

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>cd \bluespice\bin\npm

C:\bluespice\bin\npm>npm install parsoid

npm WARN deprecated circular-json@0.3.1: C 2 larJSON is in maintenance only, flattened is its successor.
npm WARN deprecated formidable@1.0.17: Old versions of Formidable are not compatible with the current Node.js; Upgrade to
p 1.2.0 or later
npm WARN deprecated is-my-json-valid@2.16.0: catastrophic backtracking in regexes could potentially lead to REDOS attack
, upgrade to 2.17.2 as soon as possible
npm WARN deprecated jade@0.26.3: Jade has been renamed to pug, please install the latest version of pug instead of jade
npm WARN deprecated kad-fs@0.0.4: Please upgrade to @kadenceproject/kadence - See https://kadence.github.io
npm WARN deprecated kad-menstore@0.0.1: Please upgrade to @kadenceproject/kadence - See https://kadence.github.io
npm WARN deprecated minimatch@0.3.0: Please update to minimatch 3.0.2 or higher to avoid a RegEx DoS issue
npm WARN deprecated nsp@2.8.1: The Node Security Platform service is shutting down 9/30 - https://blog.npmjs.org/post/17
5511531085/the-node-security-platform-service-is-shutting
npm WARN deprecated joi@6.10.1: This version is no longer maintained. Please upgrade to the latest version.
npm WARN deprecated wrack@6.3.0: This version is no longer maintained. Please upgrade to the latest version.
npm WARN deprecated to-iso-string@0.0.2: to-iso-string has been deprecated, use @segment/to-iso-string instead.

> dtrace-provider@0.8.7 install C:\bluespice\bin\npm\node_modules\dtrace-provider
> node-gyp rebuild || node suppress-error.js

C:\bluespice\bin\npm\node_modules\dtrace-provider>if not defined npm_config_node_gyp (node "C:\Program Files\nodejs\node
_modules\npm\node_modules\npm-lifecycle\node-gyp-bin\..\node_modules\node-gyp\bin\node-gyp.js" rebuild ) else (node
"C:\Program Files\nodejs\node_modules\npm\node_modules\node-gyp\bin\node-gyp.js" rebuild )
Building the projects in this solution one at a time. To enable parallel build, please add the "/m" switch.
npm ERR! spawnError ENOENT: no such file or directory, open 'C:\bluespice\bin\npm\package.json'
npm ERR! A complete log of this failure can be found in your local log at C:\bluespice\bin\npm\package-lock.json
npm WARN ENOENT: no such file or directory, open 'C:\bluespice\bin\npm\package.json'
npm WARN npm No description
npm WARN npm No repository field.
npm WARN npm No README data
npm WARN npm No license field.

+ parsoid@0.8.1
added 517 packages from 819 contributors in 115.472s

C:\bluespice\bin\npm>
```


Keep the command prompt open and complete the following step

Creating the configuration file

In the BlueSpice codebase you will find two files in the folder `extensions/BlueSpiceVisualEditorConnector/docs/parsoid`:

- `config.yaml`
- `localsettings.js`

Copy them into the folder `C:\bluespice\bin\npm\node_modules\parsoid\`.

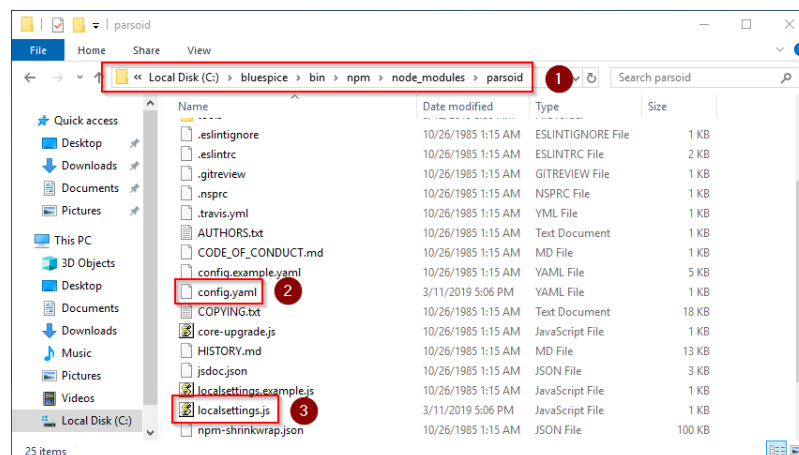


This provides an already finished configuration of Parsoid, which should work in the standard setup without further adjustments.

Parsoid installation and configuration check

To test the installation and configuration, go back to the command prompt.


Change into the directory `C:\bluespice\bin\npm\node_modules\parsoid` (1) and start the service with the command `"node bin\server.js"` (2):

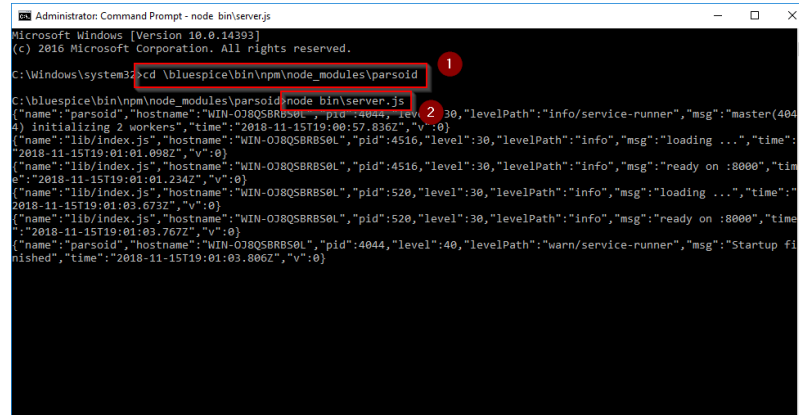

```
Administration: Command Prompt - node bin\server.js
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Windows\system32>cd \bluespice\bin\npm\node_modules\parsoid
C:\bluespice\bin\npm\node_modules\parsoid>node bin\server.js
{"name": "parsoid", "hostname": "WIN-038Q5BR8S0L", "pid": 4044, "level": 40, "levelPath": "warn/service-runner", "msg": "Startup finished", "time": "2018-11-15T19:01:03.866Z", "v": 0}
{"name": "lib/index.js", "hostname": "WIN-038Q5BR8S0L", "pid": 4516, "level": 30, "levelPath": "info", "msg": "loading ...", "time": "2018-11-15T19:01:01.098Z", "v": 0}
{"name": "lib/index.js", "hostname": "WIN-038Q5BR8S0L", "pid": 4516, "level": 30, "levelPath": "info", "msg": "ready on :8000", "time": "2018-11-15T19:01:01.234Z", "v": 0}
{"name": "lib/index.js", "hostname": "WIN-038Q5BR8S0L", "pid": 520, "level": 30, "levelPath": "info", "msg": "loading ...", "time": "2018-11-15T19:01:03.673Z", "v": 0}
{"name": "lib/index.js", "hostname": "WIN-038Q5BR8S0L", "pid": 520, "level": 30, "levelPath": "info", "msg": "ready on :8000", "time": "2018-11-15T19:01:03.767Z", "v": 0}
```

The service should now start without an error message. For further review, call the URL "<http://localhost:8000>" in Internet Explorer. You should see the following page:

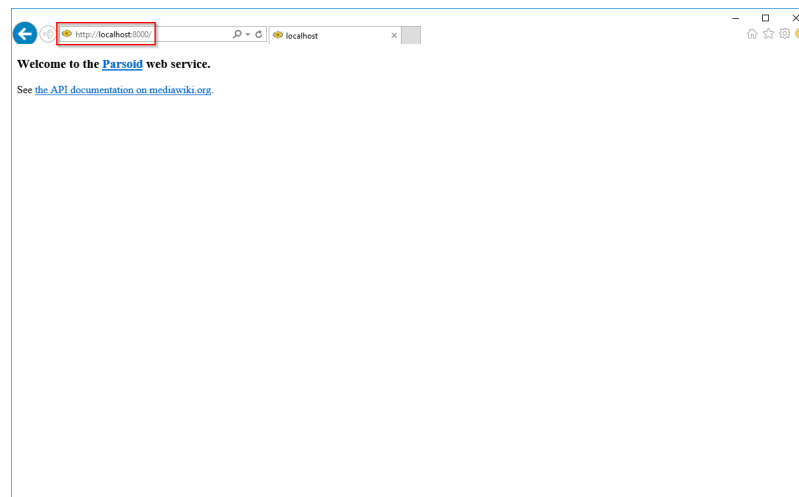

Change back to the command prompt and quit Parsoid by pressing "Ctrl+C". Keep the command prompt open and go to the next step.

Installation as a service

To run Parsoid in the background in the future, you need to install Parsoid in a Windows service. To do this, proceed as follows:

In the command prompt, change to the directory "C:\bluespice\bin\npm" (1) and execute the command "npm install node-windows" (2):

```
Administrator: Command Prompt
C:\bluespice\bin\npm>npm install node-windows
npm WARN saveError ENOENT: no such file or directory, open 'C:\bluespice\bin\npm\package.json'
npm WARN enoent ENOENT: no such file or directory, open 'C:\bluespice\bin\npm\package.json'
npm WARN npm No repository field.
npm WARN npm No README data
npm WARN npm No license field.

+ node-windows@0.1.14
added 3 packages from 8 contributors in 9.488s
C:\bluespice\bin\npm>
```

Using a text editor, create the file "C:\bluespice\bin\npm\node_modules\parsoid\ parsoid.service" with the help of [this linked content](#):

```
parsoid.service - Notepad
File Edit Format View Help
var Service = require('node-windows').Service;

// Create a new service object
var svc = new Service({
  name: 'Parsoid Web Service',
  description: 'Parsoid Web Service for MediaWiki',
  script: 'C:\\bluespice\\bin\\npm\\node_modules\\parsoid\\bin\\server.js'
});

// Listen for the "install" event, which indicates the
// process is available as a service.
svc.on('install',function(){
  svc.start();
});

svc.install();
```

In the command prompt, change into the directory "C:\bluespice\bin\npm\node_modules\parsoid" (1) and execute the command "node parsoid.service" (2):

```
Administration: Command Prompt
e":{"time":"2018-11-15T19:01:01.234Z","v":0}
{"name":"lib/index.js","hostname":"WIN-038Q5BR8S0L","pid":520,"level":30,"levelPath":"info","msg":"loading ...","time":
2018-11-15T19:01:03.673Z","v":0}
{"name":"lib/index.js","hostname":"WIN-038Q5BR8S0L","pid":520,"level":30,"levelPath":"info","msg":"ready on :8000","time":
"2018-11-15T19:01:03.767Z","v":0}
{"name":"parsoid","hostname":"WIN-038Q5BR8S0L","pid":4044,"level":40,"levelPath":"warn/service-runner","msg":"Startup fi
nished","time":"2018-11-15T19:01:03.806Z","v":0}
{"name":"parsoid","hostname":"WIN-038Q5BR8S0L","pid":4044,"level":30,"levelPath":"info/service-runner/master","msg":"mas
ter shutting down, killing workers","time":"2018-11-15T19:07:38.800Z","v":0}
{"name":"parsoid","hostname":"WIN-038Q5BR8S0L","pid":4044,"level":30,"levelPath":"info/service-runner/master","msg":"Exi
ting master","time":"2018-11-15T19:07:38.818Z","v":0}

C:\bluespice\bin\npm\node_modules\parsoid>cd C:\bluespice\bin\npm

C:\bluespice\bin\npm>npm install node-windows
npm WARN saveError ENOENT: no such file or directory, open 'C:\bluespice\bin\npm\package.json'
npm WARN enoent ENOENT: no such file or directory, open 'C:\bluespice\bin\npm\package.json'
npm WARN npm No description
npm WARN npm No repository field.
npm WARN npm No README data
npm WARN npm No license field.


+ node-windows@0.1.14
added 3 packages from 8 contributors in 9.488s

C:\bluespice\bin\npm>cd C:\bluespice\bin\npm\node_modules\parsoid 1
C:\bluespice\bin\npm\node_modules\parsoid>node parsoid.service 2
C:\bluespice\bin\npm\node_modules\parsoid>
```


You can now close the command prompt.

Then enter the key combination Windows+R.


In the following dialog box, enter "services.msc" (1) and confirm with "OK" (2):

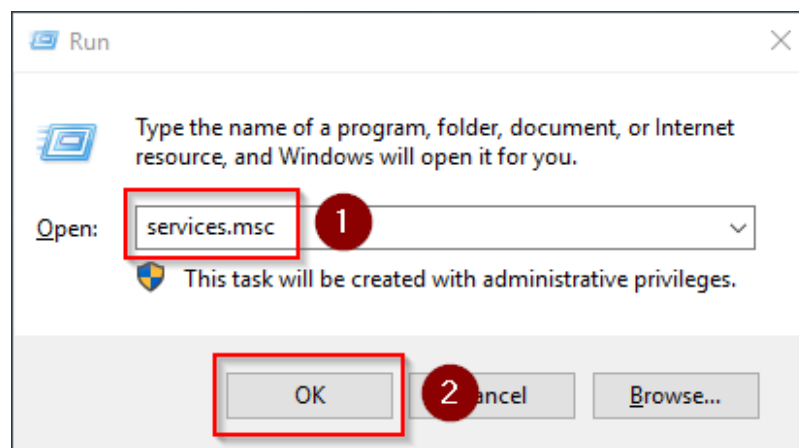

Find the service "Parsoid Web Service" and open it with a double-click:

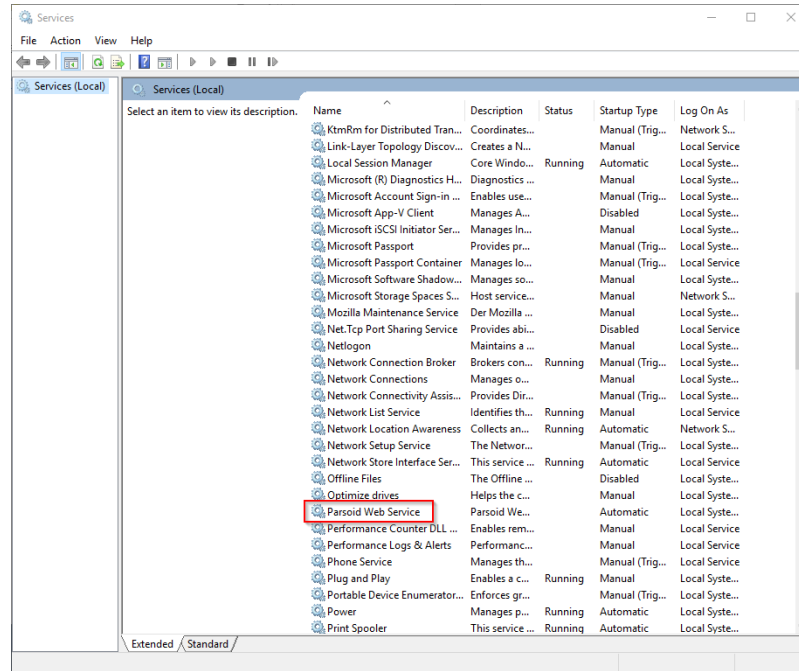

Select the startup type "Automatic" (1) and start the service (2). After the service is started, close the window with "OK" (3):

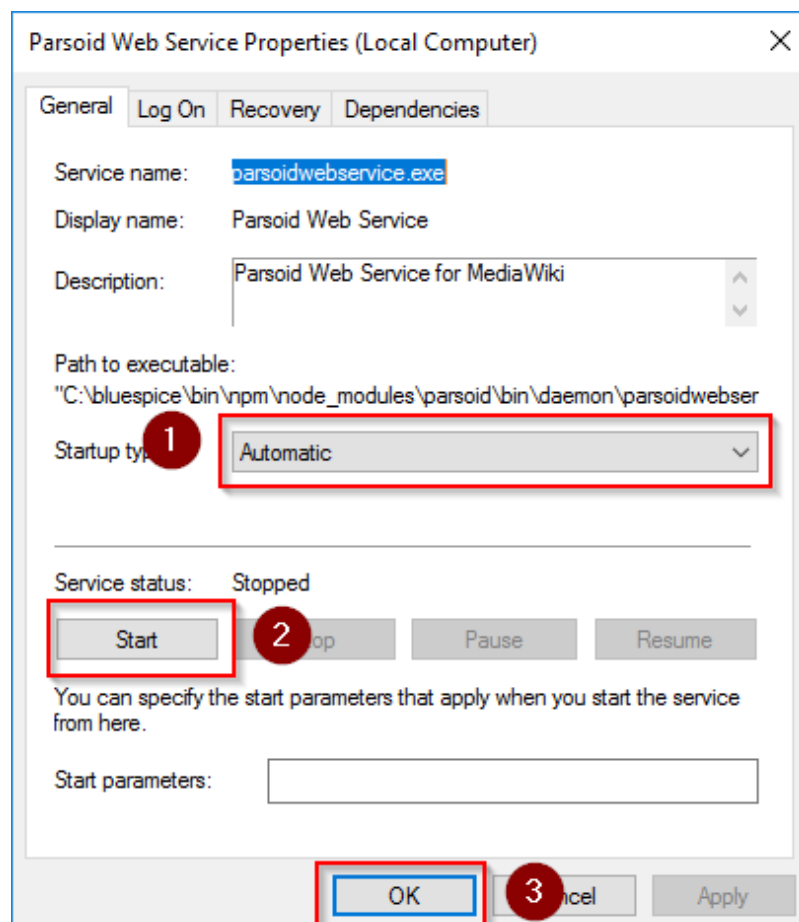

In Internet Explorer, check the URL "<http://localhost:8000>", as already explained in the previous step, whether the Parsoid service started successfully.

Next step

If you have completed all steps successfully, you can proceed to the next step "[Python](#)".