

## Manual:Extension/BlueSpiceSmartList


A [quality version](#) of this page, [approved](#) on *30 July 2020*, was based off this revision.

The extension **SmartList** allows to insert a list of pages in a wiki page using the tags *smartlist*, *newbies*, or *toplist*. The selection criteria can be set using a dialog box.

### Contents

1 Available tags .....	2
2 Smartlist .....	3
2.1 Parameters .....	3
3 Newbies .....	4
3.1 Parameters .....	4
3.2 Example in wikicode .....	4
4 Toplist .....	4
4.1 Parameters .....	4
4.2 Example in wikicode .....	5
5 Related info .....	5

## Available tags

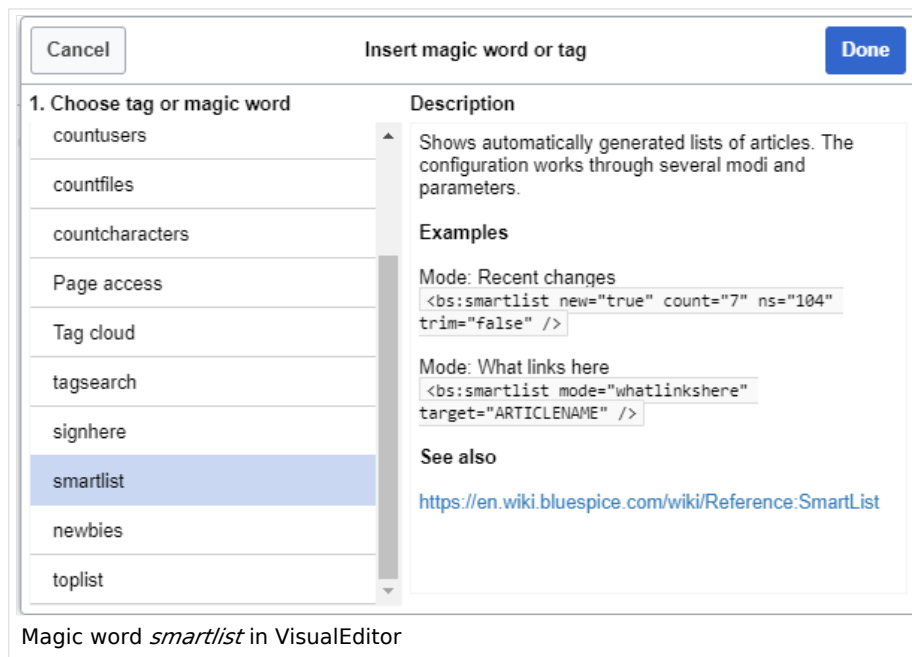


The extension SmartList offers three different tags:

- `<bs:smartlist />` - display a list of pages based on different criteria
- `<bs:newbies />` - display a list of recently registered users
- `<bs:toplist />` - display a list of most visited pages

All of the tags listed above can be added through the menu *Insert* > *Magic word* in [VisualEditor](#). For more information on how to insert magic words, see [InsertMagic](#).

## Smartlist

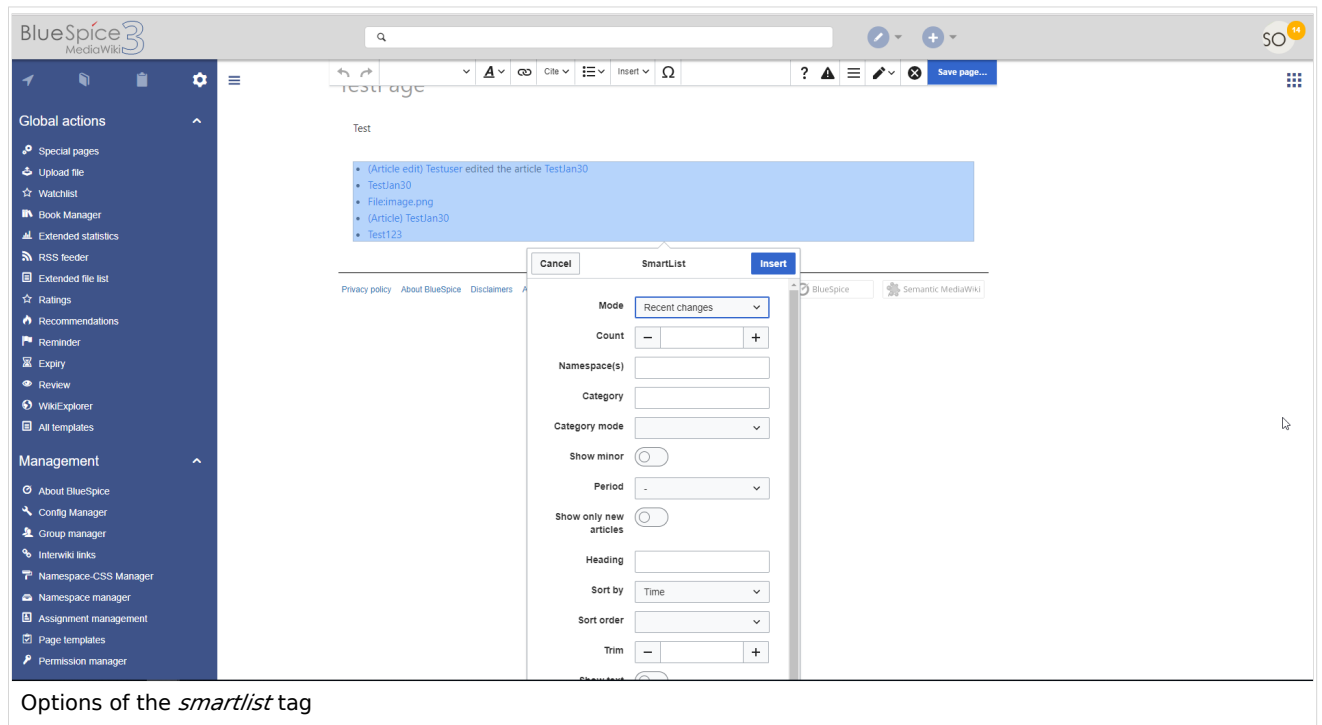

Options of the *smartlist* tag

## Parameters

The SmartList can be limited or extended with the following parameters:

Count - <b>count</b>	The number of articles to be shown. Default value: 5
Namespaces - <b>ns</b>	Only articles from given namespace will be listed. The namespaces can be entered by IDs or by names. Several namespaces can be named with pipes: ns="0 2 5" or ns="Help User Test". Default: All namespaces are included.
Exclude NS - <b>excludens</b>	Articles from given namespaces will not be shown. The namespaces can be entered by IDs or by names. Several namespaces can be named with pipes: ns="0 2 5" or ns="Help User Test". Default: All namespaces are included.
Category - <b>cat</b>	Only articles from given category will be listed. Selecting several categories is not possible. Default: All categories.
Show minor - <b>nominor</b>	Minor changes (changes marked with an "m" in the recent changes) will not be listed. Default: Minor changes are listed.

Period - <b>period</b>	Only changes within given period are shown. Possible values: 'month', 'week', 'day'. Default: No limit.
Show only new articles - <b>new</b>	Only new pages will be listed. Default: All pages are shown
Trim - <b>trim</b>	Long article names are not cropped. Default: The title is cut off after 30 characters.
Show text <b>showtext</b>	With this option, a line of the article contents will be shown alongside the title.
Trim text - <b>trimtext</b>	"trimtext" sets the number of characters of an article's content shown. This is only relevant when <i>showtext</i> ="true"). <i>Note</i> : trimtext="0" is <u>not</u> possible.

#### Example output in source code:

```
<bs:smartlist mode="recentchanges" new="true" count="7" ns="104" trim="false" />
```

## Newbies

---

The tag `<bs:newbies />` shows recently registered wiki users.

### Parameters

Count - <b>count</b>	The number of users to be shown; the default value is 10.
----------------------	---

### Example in wikicode

```
<bs:newbies count="7"/>
```

## Toplist

---

This tag shows a list of the most visited pages.

### Parameters

Count - <b>count</b>	The number of articles to be shown; the default value is 10.
----------------------	--

Namespaces - <b>ns</b>	Only articles from these namespace will be shown. You can put several namespaces here, separated by commas.
Category - <b>cat</b>	Only articles from this category will be shown. You can put several categories here, separated by commas.
Period - <b>period</b>	The period that should be used (alltime or month). The default is alltime.

## Example in wikicode

```
<bs:toplist count="7" ns="Help|QM" />
```

## Related info

---

- [Reference:BlueSpiceSmartList](#)
- [Reference:BlueSpiceInsertMagic](#)