

Reference:BlueSpiceChecklist

Extension\ BlueSpiceChecklist

Overview			
Description:	Inserts checkboxes and checklists		
State:	stable	Dependency:	MediaWiki, BlueSpice
Developer:	HalloWelt	License:	-
Type:	BlueSpice	Category:	-
Edition:	BlueSpiceFree"BlueSpiceFree" is not in the list (BlueSpice pro, BlueSpice free, BlueSpice Farm, BlueSpice Cloud, BlueSpice free (deactivated), BlueSpice pro (deactivated), BlueSpice Farm (deactivated), BlueSpice Cloud (deactivated)) of allowed values for the "BSExtensionInfoEdition" property., BlueSpicePro"BlueSpicePro" is not in the list (BlueSpice pro, BlueSpice free, BlueSpice Farm, BlueSpice Cloud, BlueSpice free (deactivated), BlueSpice pro (deactivated), BlueSpice Farm (deactivated), BlueSpice Cloud (deactivated)) of allowed values for the "BSExtensionInfoEdition" property.		
View help page			

Features

Checklist inserts checkboxes and checklists. e.g. to-do lists.

Background

Checklist inserts wiki code elements which, depending on the mode chosen, appear as check or combo boxes.

Where can I find Checklist?

Checklist is a page editor menu item. *Edit* opens the page editor and



opens the checklist dropdown.

CheckList Functions

The checklist dropdown inserts

- Recently used lists
- Single checkbox elements
- Newly created lists

Multiple checkboxes and/or checklists can be inserted into an article.

Create Checkboxes

Event

☒ Prepare Mail

☐ Book Hotel

☒ Arrange Brochure

☐ Print Posters


With checkboxes you can create simple to-do lists

Insert Checkbox : A checkbox is a single checkbox element. You insert a checkbox by clicking the Menu Icon  or the 'Checklist elements' dropdown item. Ticking the checkbox in view mode alternates the checkbox hook between false and checked and updates the article's version history, edit mode doesn't update the history.

Wikicode: The Code Editor (i.e. not the WYSIWYG Editor) edits checklist tags. i.e. the `value=""` unchecked states table below or the color hex codes further below. Clicking the  inserts `<bs:checklist value="checked" />` only. You need to add the Prepare Mail identifier.

```
<bs:checklist value="checked" /> Prepare Mail
<bs:checklist value="false" /> Book Hotel
```

Creating Lists

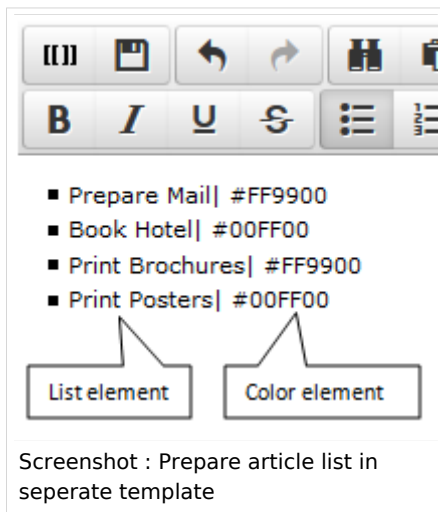

Prepare Checklist : In order to insert a checklist in an article, you must first create a checklist template that contains the necessary check list elements. This is done by creating a new article in the Template namespace. For example create a new article named 'Template:Status'. Then in the Code Editor (i.e. not the WYSIWYG Editor) add the check list items as exemplified above, *as a list*. Save the Template and remember the Template's name as you need to add this name to Insert list dialogue below.

Assign colors : To facilitate visibility, you can assign list element colors. This is done by entering the pipe symbol (straight line) after the item identifier followed by a HEX color code.

```
* Prepare Mail| #FF9900
* Book Hotel| #00FF00
```


Assign colors

To support element status visibility color codes can be linked to the list elements. This is done by adding the pipe symbol (straight line) after the list element name followed by the HEX color Code.

Typical colors;

Colour	Name	HEX-Code
	black	#000000
	grey	#888888
	red	#FF0000
	orange	#FF8800
	green	#00FF00
	blue	#0000FF
	magenta	#FF00FF

Insert checklist : The WYSIWYG Editor checklist dropdown arrow

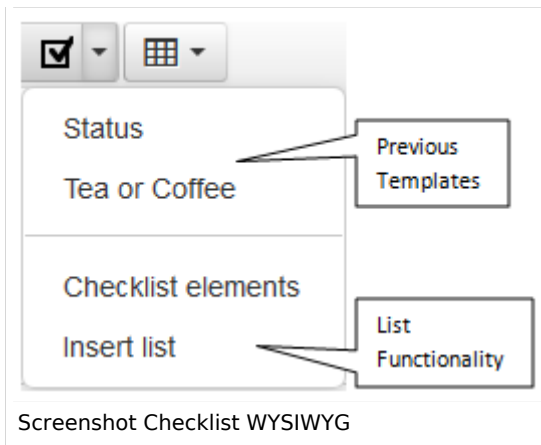

enables you to insert checklists into your articles. You simply click a previously used template or as in this case add a new checklist.

To insert a new checklist, select the Insert list item in the dropdown. Then in the popup click on the + sign to add a new template. You must now enter the exact template title created above. Clicking " Ok " inserts the template's checklist items into your current article.

Event

What	Who	Status
Mailing List preparation	TW	Unallocated
Book Hotel Accommodation	TW	Allocated
Order Brochures	NK	Busy
Print Poster	NK	Completed

Example of Checklist being used for employee and status allocations.

As an example, you can add in multiple table row lists to show a tasks status of tasks , this might look like this.

Authorisation

- Anyone who has write permissions can use the Checklist tag.
- Anyone who has the checklistmodify permission can modify a checklist.

Designation	Description	Standard group
<i>checklistmodify</i>	Allows you to change a checklist item	user

CheckList\Tag Paramaters

You can of course also use Wikicode to insert check boxes and checklists. A Checklist-Tag creates a single form field, which depending on the mode is a checkbox or select box. It has the following parameters:

Name	Description	Type / Value range	Default value
<i>type</i>	Modus: If the checklist item as a list or as	check, list	check
<i>value</i>	Current value	str	-
<i>list</i>	Contains the name of the page in the MediaWiki namespace of the list entries. Mandatory when type is 'list'	str	-
<i>id</i>	Optional indication of ID that can be used to identify the items	str	-

Classic MediaWiki

Classic MediaWiki does not provide checklist functionality.