

Manual:Extension/Blog

Contents

1 What is Blog?	2
2 Blog by default	2
2.1 Display Blog on any wiki page	2
3 Blog tags	5
3.1 Write an entry or create a new entry	5
3.2 Creating a second blog	5
3.3 <bs:blog></bs:blog> attributes	5
4 Tips for working with blogs	6
5 See also	6



What is Blog?

Blog extension allows creating news feeds on the wiki. These news feeds can be shown on any page, and users can be allowed to add their own news.

Blog by default


By default, there is a link to the Blog page in the TopMenuBar, which then opens the blog, a page containing a form for writing a new blog entry and a list of previous entries.

Neuer Ordne	er		
/	BlueSpice		🕭 ° 🖾 ° 🚺 Testuser
	Blue Spice MediaWiki		Search Q
		PAGE DISCUSSION (0)	🛨 EDIT HISTORY & V
		🥒 34 minutes and 38 seconds ago 🏦 Testuser	DETAILS 😽
	GLOBAL ACTIONS Upload file 12 File list Extended file list Watchlist Special pages Review Book Manager Extended statistics Ratings Expiry BlueSpice administration Review	TestPageB TestPageBlueSpice. The MediaWiki Enterprise Distribution. Tind everything immediately. Update knowledge faster: BlueSpice is the e Working is as simple and uncomplicated as you would expect from wikis as Contents [hide] 1 BlueSpice free 1 BlueSpice free 2. 1 Create content, find it quickly and use it effectively 3. BlueSpice free Features 3.1 Your access to an effective enterprise wiki	
	WikiExplorer	BlueSpice free	/
	ADMINISTRATION Assignment management Category manager	BlueSpice free is the gratis version for an entry level solution for businesse Download this basic BlueSpice version on sourceforge for free.	es. It provides a functional added value for wiki admins and users.
	A second s		

Display Blog on any wiki page

This blog news feed can be displayed on any wiki page by adding the blog tag to the page.

BlueSpice

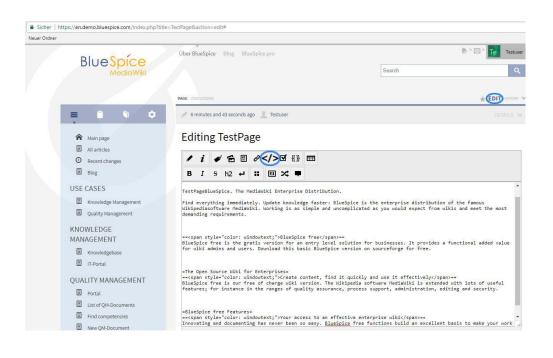

Neuer Ordner				
			· 전 · 전· Te	
	MedioWiki			
		Page Editoria (m	tor control s	
	= = • •	Insert magic word or tag	S Internet of States of St	
	Atain page	1. Choose tag or magic word Tags		
		blog		
	Blog	blogmore blogtime		
		booklist		
		2. Modify code	distribution of the famous xpect from wikis and meet the most	
	Knowledge Management Quality Management			
	KNOWLEDGE MANAGEMENT		t provides a functional added value	
			Ok Cancel	
		BlueSpice free is our free of charge wiki version. The	ctively(/span) Wikipedia software HediaWiki is extended with lots of useful	
		features; for instance in the ranges of quality assura	nce, process support, administration, editing and security.	
		=BlueSpice free Features= == Your access to an e	ffective enterprise wikik/span>==	
		more effective and collaborate on content in teams. He	eSpice free functions build an excellent basis to make your work re you can find a list including all the features of our	
		software and a comparison of <u>BlueSpice</u> free and <u>BlueSp</u>	ice pro Compare them and see all the possibilities.	



iner			
/	BlueSpice	Über BlueSpice Blog BlueSpice pro	🕒 ° 🖾 ° 🔽 Testus
Blue Spice MediaWiki	MediaWiki		Search
		PAGE DISCUSSION	EDIT HISTORY
		🥒 14 minutes and 9 seconds ago 👤 Testuser	DETAILS
	A Main page	Editing TestPage	
	All articles		
	Ø Recent changes	/ i / ≅ ⊠ ∂ ⊻ {}} ⊞	
	Blog	B I S h2 ↔ II II X4 ■	
	USE CASES	<pre></pre>	1
	E Knowledge Management	TestPageBlueSpice. The MediaWiki Enterprise Distribution.	
	Quality Management		
	KNOWLEDGE	Find everything immediately. Update knowledge faster: BlueSpice is the enterprise distribution of the famous Wikipedisoftware MediaWiki. Working is as simple and uncomplicated as you would expect from wikis and meet the m demanding requirements.	
	MANAGEMENT		
	E Knowledgebase	== BlueSpice free<td></td>	
	IT-Portal	BlueSpice free is the gratis version for an entry level solution for businesses. It provides a functional addec for wiki admins and users. Download this basic BlueSpice version on sourceforge for free.	
	QUALITY MANAGEMENT		
	Portal	 The Open Source Wiki for Enterprises Stars at the "close indicates" indicates the open style "close indicates and the indicates at the open style "close indicates and the indicates at the open style "close indicates" indicates at the open style "close indicates at the open style "close indicates at the open style "close indicates" indicates at the open style "close indicates at the open style "close" indingen style "close	
	E List of QM-Documents		
	Find competencies		
	New QM-Document		

Sicher	https://en.demo.bluespice.com/wiki/TestPage		
Neuer Ordner			
	BlueSpice	Über BlueSpice Blog BlueSpice pro	🕑 ° 🖾 ° 🔀 Testuser
	Blue Spice MediaWiki		Search Q
		PAGE Discussion (0)	★ EDIT HISTORY 🕹 🗸
		🖋 2 seconds ago 🔔 Testuser	DETAILS 🗸
	Main page All articles Recent changes Blog	TestPage Create new blog entry	
	USE CASES Knowledge Management Ouality Management	Title	Create
	KNOWLEDGE MANAGEMENT	Contract plan or thin one year and 5 months ago - Sissy Oppermann The technical plan for this year can be reviewed as draft versio Comments (1) - Permalink TestBlo	n. I'm looking forward to comments by the end of next week!
	TrPortal ULLITY MANAGEMENT Portal List of QM-Documents Find competencies	TestPageBlueSpice. The MediaWiki Enterprise Distribution.	pice is the enterprise distribution of the famous Wikipediasoftware MediaWiki. from wikis and meet the most demanding requirements.
	New QM-Document	Contents [hide]	

This also displays a "Create new blog entry"-form on the page, unless it is disabled to use blog tag attributes.

A blog entry consists of a title, revision information (date and author of first revision), the entry itself and possibly links for comments and a permalink.

If a blog entry is too long, the link "continue reading" is displayed.



Blog tags

Blog extension offers several tags. These tags can be added to a page using InsertMagic functionality, or writing tag syntax directly to wiki code editor.

Wiki tag	Description
<bs:blog></bs:blog>	Displays blog news feed on the page. It can be extended with multiple attributes. For more on attubutes read section "Blog tag attibutes" below.
<bs:blog:more></bs:blog:more>	This tag should be placed inside the content of a blog entry (pages in Blog namespace) to define at which point in text "continue reading" link should be placed. This will override default cut-off length of an entry.
<bs:blog:time time=" YYYYMMDDHHmm" /></bs:blog:time 	This tag also should be placed inside the content of a blog entry. It allows manually defining timestamp for that particular blog entry. Timestamp is used in sorting and displaying blog entries.

Write an entry or create a new entry

New blog entries can be created through the form on the page containing a blog tag, on Blog special page (Special:Blog), or by directly creating new pages in the Blog namespace.

Creating a second blog

As described the default blog feed consists of "normal" wiki pages stored in the Blog namespace. Other blog feeds can exist in addition to this feed, and they can be defined by category. For example, the category "Company news" can be designated for a second blog. In that case all pages in this category will be considered entries of this blog and will be displayed on page as blog entries. By adding <bs:blog /> tag to the page, attribute "cat" must be set to "Company news" like <bs:blog cat="Company news" />

Another option is to designate a namespace for this purpose. Using example from above, namespace "Company news" must be created and all pages inside this namespace (Company news:News1, Company news:News2) will be considered blog entries. The syntax that should be used for the blog tag in this case is: <bs:blog ns="Company news" />

Keep in mind that when blog tags with "cat" or "ns" are used, all pages from that category /namespace will be shown, so those categories/namespaces should be used for that purpose only.

<bs:blog /> attributes

The following tag arguments can be used with the tag <bs:blog />:

Attribute	Description	Value
count	Number of blog entries to be displayed.	number



*N*ediaWiki

Attribute	Description	Value
cat	Category from which to show pages as blog entries	category name
ns	Namespace from which to show pages as blog entries	namespace name or ID
newentryfield	Should "Create new blog entry" be shown?	0 or 1
newentryfieldposition	Position of the "Create new blog entry" form.	"bottom" or "top"
renderimages	Should images be displayed	0 or 1
maxchars	Number of characters that should be shown before the "Continue reading" link is shown.	number

Default values for these attributes for the whole wiki can be set in the global BlueSpice preferences. See Reference page.

Tips for working with blogs

Put a link to the blog in the left hand navigation menu. Then your colleagues will be able to find the blog whenever they want.

See also

Our [page.]