

Contents

1. Extension/SmartList	2
2. Manual:Extension/BlueSpiceInsertMagic	7
3. Manual:Extension/VisualEditor	9
4. Reference:BlueSpiceInsertMagic	12
5. Reference:BlueSpiceSmartList	13


Extension/SmartList

The extension **SmartList** allows to insert a list of pages in a wiki page using the tags *smartlist*, *newbies*, or *toplist*. The selection criteria can be set using a dialog box.

Contents

1 Available tags	3
2 Smartlist	4
2.1 Parameters	4
3 Newbies	5
3.1 Parameters	6
3.2 Example in wikicode	6
4 Toplist	6
4.1 Parameters	6
4.2 Example in wikicode	6
5 Related info	6

Available tags

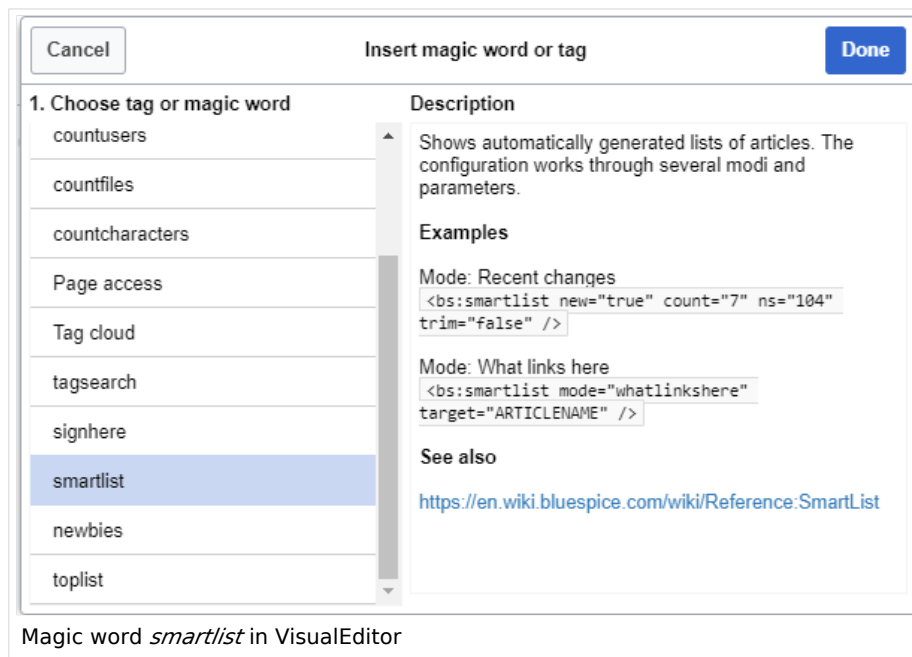


The extension SmartList offers three different tags:

- `<bs:smartlist />` - display a list of pages based on different criteria
- `<bs:newbies />` - display a list of recently registered users
- `<bs:toplist />` - display a list of most visited pages

All of the tags listed above can be added through the menu *Insert* > *Magic word* in [VisualEditor](#). For more information on how to insert magic words, see [InsertMagic](#).

Smartlist

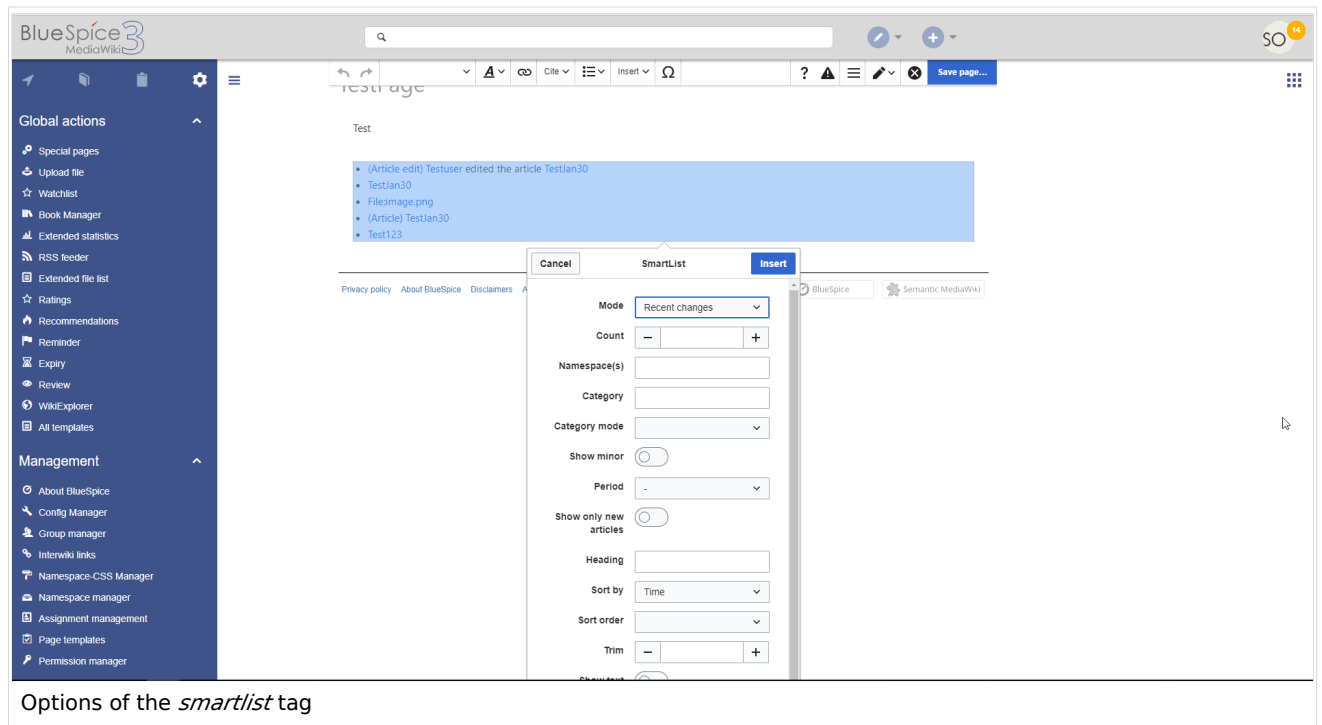

Options of the *smartlist* tag

Parameters

The SmartList can be limited or extended with the following parameters:

Label	Parameter	Values	Description
Count	count	number	The number of articles to be shown. Default value: 5
Namespace (s)	ns	number or name	Only articles from given namespace will be listed. The namespaces can be entered by IDs or by names. Several namespaces can be named with pipes: ns="0 2 5" or ns="Help User Test". Default: All namespaces are included.
Category	cat	name	Only articles from given category will be listed. Selecting several categories is not possible. Default: All categories.
Category mode	catmode	AND, OR	Show pages if they are in at least one of the categories (OR) or show pages if they are tagged with all categories (AND).
Show minor	minor	true, false	Minor changes (changes marked with an "m" in the recent changes) will not be listed. Default: Minor changes are listed.

Period	period	-, month, week, day	Only changes within given period are shown. Default: No limit.
Show only new articles	new	true, false	Only new pages will be listed. Default: All pages are shown
Heading	heading	text	Adds a heading above the list
Sort by	sort	Title, Time	Sort results by title or by latest edited.
Sort order	order	asc, desc	Ascending or descending sort order.
Trim	trim	number	Long article names are not cropped. Default: The title is cut off after 30 characters.
Show text	showtext	true, false	With this option, a line of the article contents will be shown alongside the title.
Trim text	trimtext	number	"trimtext" sets the number of characters of an article's content shown. This is only relevant when <i>showtext="true"</i>). <i>Note</i> : trimtext="0" is <u>not</u> possible.
Show namespaces	shows	true, false	If true, the namespace prefix is shown with the page names.
Number with text	numwithtext	number	Anzahl der Artikel die mit Einführungstext angezeigt werden sollen. Nur effektiv wenn <i>showtext=true</i>
Meta	meta	true	The username and date for the last edit are shown.
Target	target	-	Obsolete
Exclude namespace (s)	excludens	number or name	Articles from given namespaces will not be shown. The namespaces can be entered by IDs or by names (comma-separated). Default: All namespaces are included.

Example output in source code:

```
<bs:smartlist category="ISO9001" new="true" count="7" ns="104" trim="false" />
```

Newbies

The tag `<bs:newbies />` shows recently registered wiki users.

Parameters

Label	Parameter	Values	Description
Count - count			The number of users to be shown; the default value is 10.

Example in wikicode

```
<bs:newbies count="7"/>
```

Toplist

This tag shows a list of the most visited pages.

Parameters

Label	Parameter	Values	Description
Count	count	number	The number of articles to be shown; the default value is 10.
Namespaces	ns	text, text	Only articles from these namespace will be shown. You can put several namespaces here, separated by commas.
Category	cat	text, text	Only articles from this category will be shown. You can put several categories here, separated by commas.
Period	period	month, alltime	The period that should be used. The default is alltime.

Example in wikicode

```
<bs:toplist count="7" ns="Help|QM" />
```

Related info

- [Reference:BlueSpiceSmartList](#)
- [Reference:BlueSpiceInsertMagic](#)

Insert tags and magic words

A [quality version](#) of this page, [approved](#) on *30 July 2020*, was based off this revision.


The extension **InsertMagic** provides a dialog for inserting Magic Words in the [visual editor](#).

Contents


1 Inserting magic words	8
2 Related info	8

Inserting magic words

In edit mode, click on *Insert* in the editor toolbar and select *Magic word* from the dropdown menu.

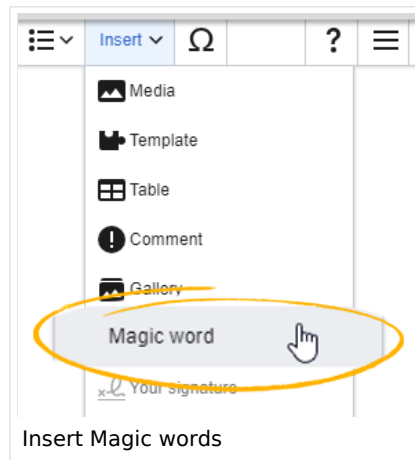

Once the magic word is selected in the list on the left, a description, including usage examples, will appear on the right.

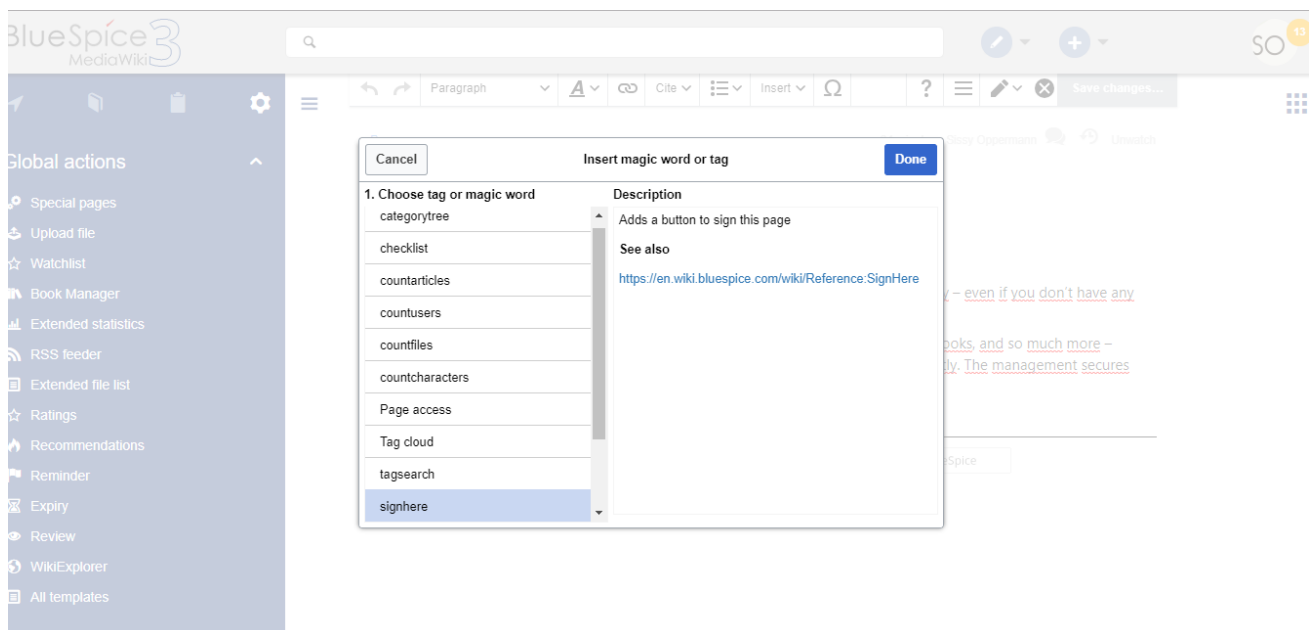

After saving the dialog, further parameters can be set for the selected magic word or tag.

Related info

- [Category tree](#)
- [Checklists](#)
- [Count things](#)

- [Drawio](#)
- [Page access](#)
- [Sign here](#)
- [Smartlist](#)
- [Tag cloud](#)
- [Tag search](#)
- [Reference:BlueSpiceInsertMagic](#)

Manual:Extension/VisualEditor

Redirect to:

- [Manual:VisualEditor](#)

Contents

1 What is VisualEditor?	10
2 How to find the visual editor?	10
3 The functions of the editor	10
3.1 Fundamental functions	10
3.2 Working with tables	11
4 Tips for working with the WYSIWYG editor	11
5 Settings	12
6 See also	12

What is VisualEditor?


VisualEditor (also called WYSIWYG - what you see is what you get) is an editor you can use without having to enter special markup (like HTML, wiki tags). The editor bars resemble those of commonly used word processing programs.

How to find the visual editor?

When you switch to the edit mode of an article, you will be presented with the wiki code at first. To activate the WYSIWYG editor, click on the following button:



The article's text will now be displayed with its formatting. Above the input field, you can see a new toolbar:

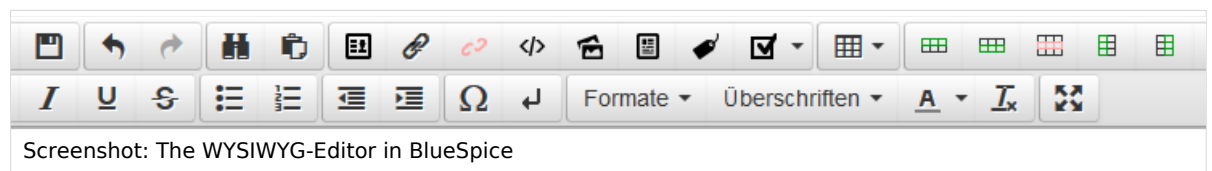



















Screenshot: The WYSIWYG-Editor in BlueSpice

The functions of the editor

The editor does exactly what you would expect from standard word processing programs: You mark the elements you want to change, and then choose the change, for example bold, from the toolbar. The change in formatting can be seen immediately. Hallo Welt! implements the WYSIWYG editor as an optional editor only so as not to restrict the variety of MediaWiki's design possibilities.

Fundamental functions

Button	Function
	switch to editing using the wiki code
	save
	undo; redo
	find and replace
	paste as formatted text (e.g. from Word)
	insert signature
	insert or edit link; you can find out how to insert links to any sites you want at the page InsertLink .
	remove link

	insert tags or MagicWords. More at InsertMagic
	insert image; the function InsertImage lets you upload and embed images.
	insert file
	insert category; the feature Insert Category gives you an overview of the categories which already exist and lets you assign them to the current article.
	
	insert checkboxes or checklists
	insert table (also "table properties" and "delete table")
	insert row above, insert row below, delete this row; insert column to the left, insert column to the right, delete this column
	bold; cursive; underlined;
	list with bullet points; numbered list
	decrease indent; increase indent
	insert special symbol
	insert line break
	headings; Inline; alignment(left; center; right); table (standard, sortable, greyscale); pre
	define headings
	text color
	remove formatting
	edit in full screen mode

Working with tables

As uncomplicated as it may be for other formatting, wiki code is not ideal for tables. However, in the WYSIWYG editor, you can work with tables quickly and easily. Note that the majority of the buttons which deal with table formatting will only become active when a table is selected.

Tips for working with the WYSIWYG editor

- The WYSIWYG editor makes it easier to work with tables and images, in particular. We recommend working with normal wiki tags when making or editing complex pages.
- TinyMCE is a web editor and so cannot be guaranteed to work completely smoothly with desktop applications like, for example, Word. You will need to be tolerant and be pleased that the editor at least makes some of your work easier.
- The editor can be activated by default by changing your settings under personal settings => BlueSpice => visual editor.

Settings

- When BlueSpice is installed, VisualEditor is set as default editor. This means, every new registered user gets VisualEditor as default.
- Every users can diable VisualEditor as default editor in his personal settings.
- To change a setting for all users, a sysadmin has to change all settings with help of a script.

See also

Our [reference page](#).

Reference:BlueSpiceInsertMagic

Extension\>: BlueSpiceInsertMagic

Overview			
Description:	Adds a dialog allowing the insertion of magic words and tags		
State:	stable	Dependency:	BlueSpice
Developer:	HalloWelt	License:	GPL-3.0-onlyProperty "BSExtensionInfoLicense" (as page type) with input value "</br>GPL-3.0-only" contains invalid characters or is incomplete and therefore can cause unexpected results during a query or annotation process.
Type:	BlueSpice	Category:	Editor
Edition:	BlueSpice free, BlueSpice pro, BlueSpice Farm, BlueSpice Cloud		
View help page			

Features

InsertMagic provides a dialog for inserting Magic Words in [VisualEditor](#).

You can open the dialog box in visual and source editing modes from the editing toolbar. A selection of tags and magic words is offered. After inserting a tag on the page, further parameters can be set.

Technical Information

This information applies to BlueSpice 3 . Technical details for BlueSpice cloud can differ in some cases.

Requirements

MediaWiki: 1.31
BlueSpiceFoundation: 3.2

Integrates into

- VisualEditor

Special pages

API Modules

- bs-insertmagic-data-store

Hooks

- [BeforePageDisplay](#)

Reference:BlueSpiceSmartList

Extension\>: BlueSpiceSmartList

Overview			
Description:	Displays the last five changes of the wiki in a list		
State:	stable	Dependency:	BlueSpice

Overview			
Developer:	HalloWelt	License:	GPL-3.0-onlyProperty "BSExtensionInfoLicense" (as page type) with input value "</br>GPL-3.0-only" contains invalid characters or is incomplete and therefore can cause unexpected results during a query or annotation process.
Type:	BlueSpice	Category:	Reporting
Edition:	BlueSpice free, BlueSpice pro, BlueSpice Farm, BlueSpice Cloud		
View help page			

Features

BlueSpiceSmartList introduces various tags that can be placed on any page to show a list of the most relevant pages based on different criteria.

The tag *newbies* shows the latest added user accounts. The *toplist* tag shows the most popular content pages.

The tag *smartlist* accepts the following parameters:

- categories to show
- whether to show comments
- number of results
- namespace
- sort order
- time period
- show minor changes
- show page title with namespace
- only show new pages
- show page content
- maximum length of the title (in characters).
- maximum length of the page content (in characters).

Technical Information

This information applies to BlueSpice 3 . Technical details for BlueSpice cloud can differ in some cases.

Requirements

MediaWiki: 1.31

BlueSpiceFoundation: 3.2

Integrates into

- BlueSpiceUserSidebar
- VisualEditor

Special pages

API Modules

- bs-smartlist-tasks

Hooks

- [BSInsertMagicAjaxGetData](#)
- [BSUsageTrackerRegisterCollectors](#)