

Contents

1. Manual:Extension/BlueSpiceExpiry	2
2. Manual:Extension/BlueSpiceConfigManager	5
3. Manual:Extension/BlueSpiceReminder	22
4. Quality assurance	26
5. Reference:BlueSpiceExpiry	26

Manual:Extension/BlueSpiceExpiry


A [quality version](#) of this page, [approved](#) on *5 October 2020*, was based off this revision.

Expiry marks a wiki page as "obsolete". The page can be updated by editing or by confirming that the page is still up-to-date. Expiry is the ideal basis for an archiving system. Outdated articles can be moved to an archive after being queried. Expiry can be set on any content page of the wiki.

Contents

1 Expiring a page	3
2 Overview of expired wiki pages	4
3 Configuration	4
4 Related info	5


Expiring a page

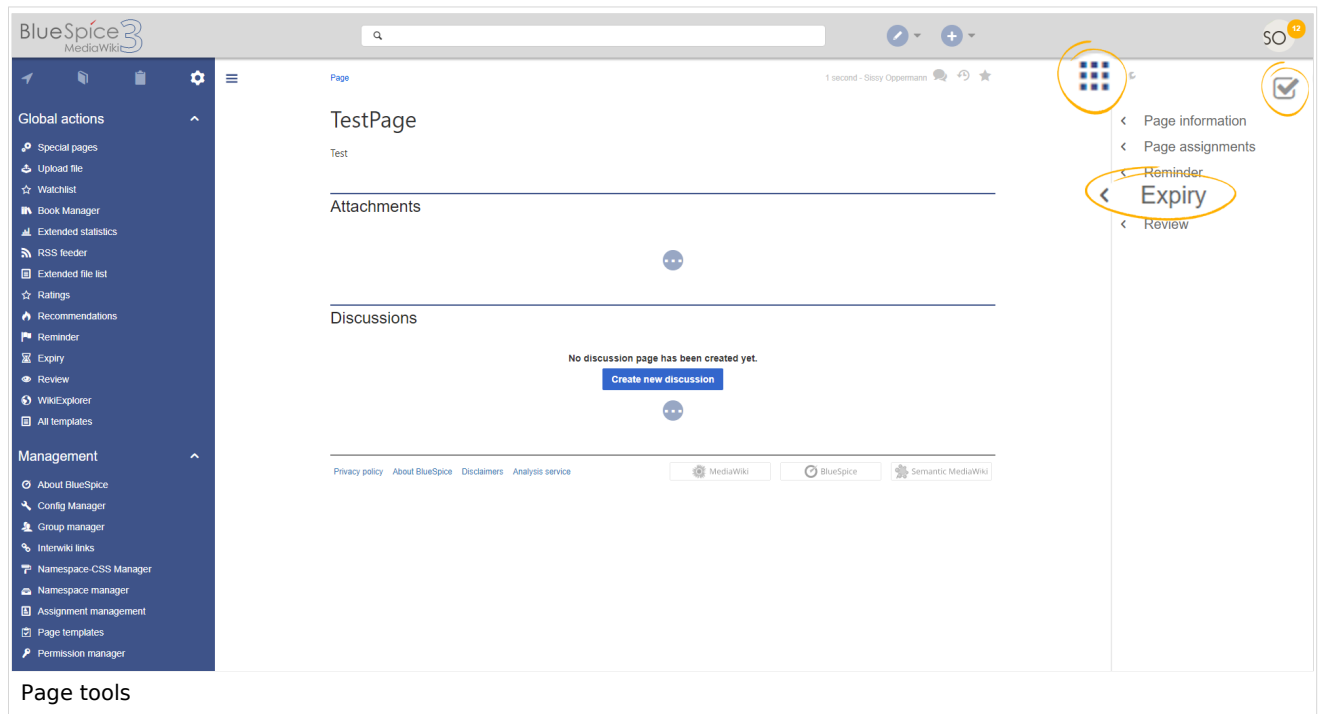

Expiry for a page can be set from the *Quality management tab* in the page tools. After clicking on "Expiry", a form opens in a fly-out layer.


If the page has already been expired, the expiration date is shown. In this case, a user can remove the expiration from the page by clicking on *Unexpire the page*.

If no expiration date is set, users can set an expiration date and enter a short comment: In addition, the user can create a [reminder](#) for the page. After saving the form, the page is reloaded and updated information is displayed.

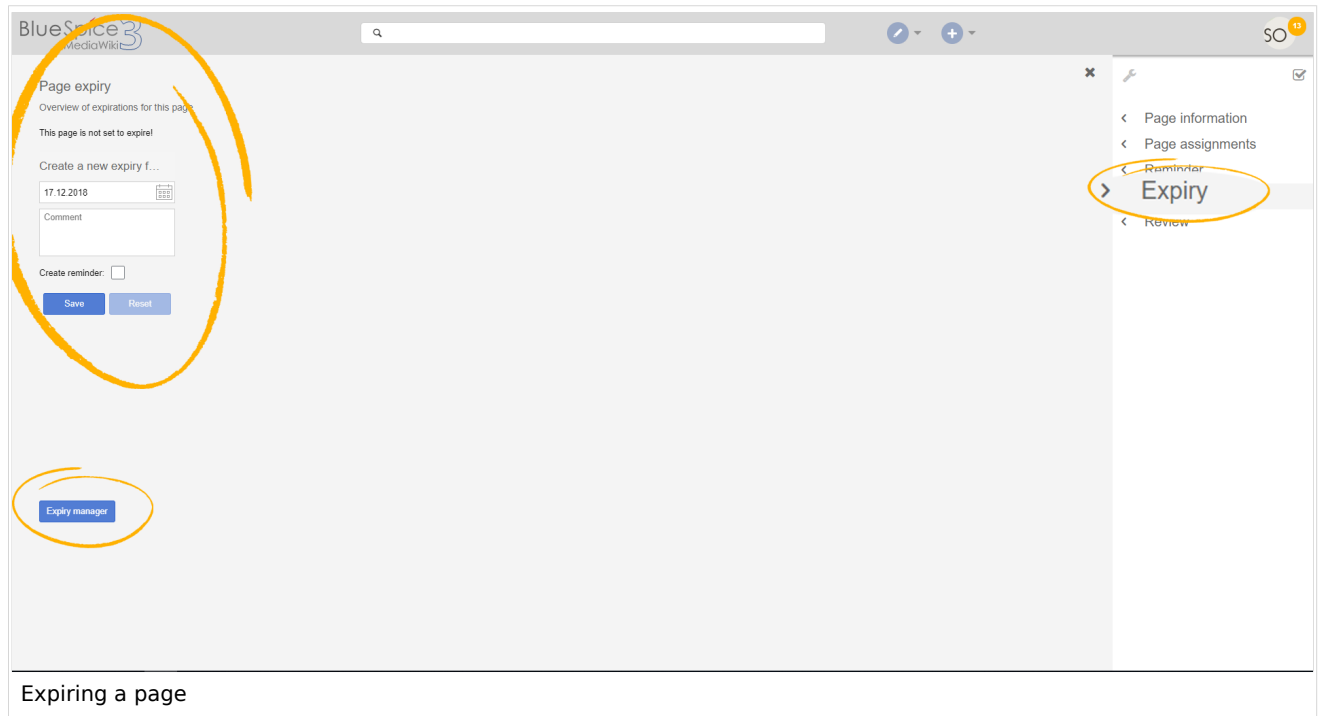

Overview of expired wiki pages


Users can see all of the pages set to expire, along with expiry information for those pages on *Special:Expiry* page. This page can be accessed from the Expiry flyout described above, by clicking on Expiry manager at the bottom of the flyout. All expiration dates can be deleted or edited from this page.

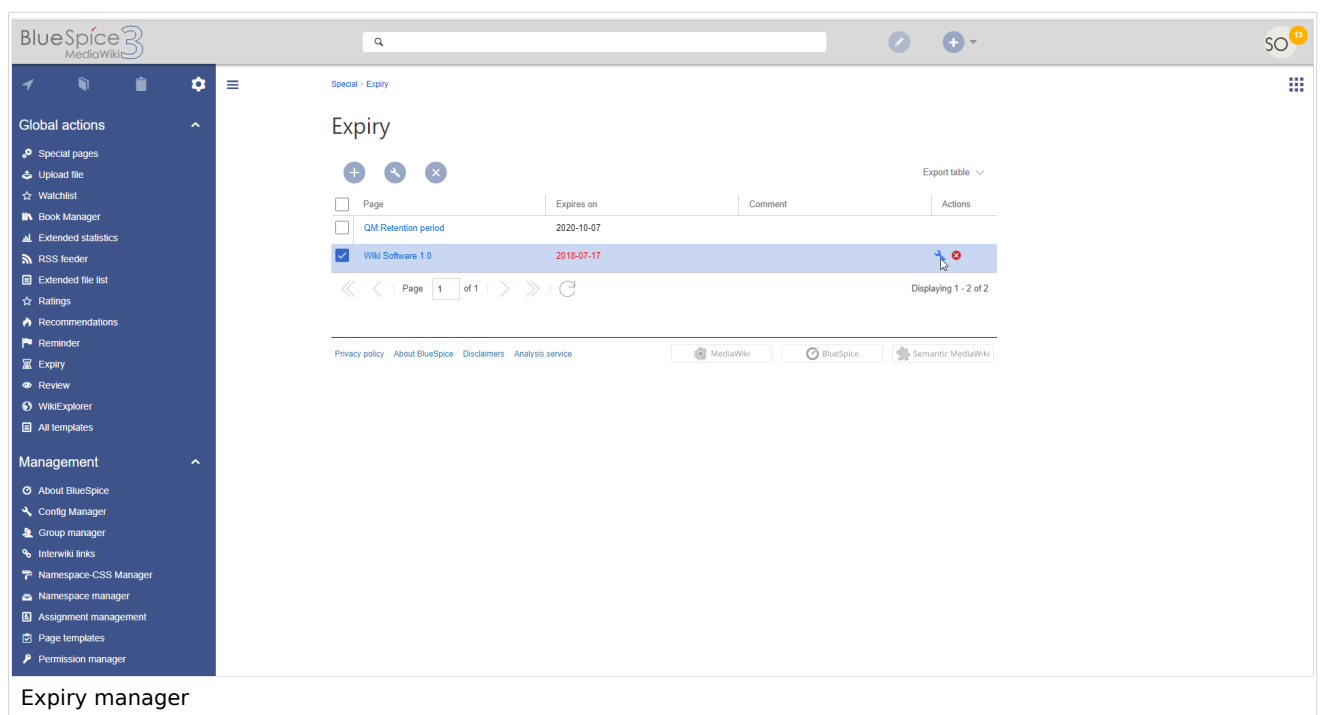

Configuration

In the [Config manager](#), you can change the following settings:

- **Show watermark for expired pages in PDF:** Shows the watermark for expired pages in PDFs.
- **Show watermark for expired pages in print version:** Shows the watermark for expired pages when a page is printed.
- **Show watermark for expired pages:** Shows a watermark on the page itself.

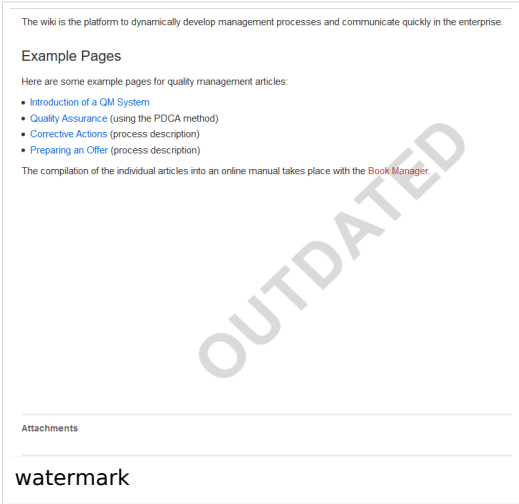

Related info

- [Quality assurance](#)
- [Reference:BlueSpiceExpiry](#)

Config manager

A [quality version](#) of this page, [approved](#) on *6 October 2021*, was based off this revision.

Contents

1	Layout	7
1.1	Filter options	7
1.2	Searching for settings	7
2	Settings by extension	8
2.1	BlueSpiceFoundation	8
2.1.1	Updating logo and favicon	8
2.1.2	System	9
2.2	BlueSpiceAbout	9
2.3	BlueSpiceArticleInfo	10

2.4	BlueSpiceAuthors	10
2.5	BlueSpiceAvatars	11
2.6	BlueSpiceBookshelf	11
2.7	BlueSpiceChecklist	13
2.8	BlueSpiceExtendedSearch	13
2.9	BlueSpiceExtendedStatistics	14
2.10	BlueSpiceInsertCategory	14
2.11	BlueSpiceInsertLink	14
2.12	BlueSpicePageTemplates	15
2.13	BlueSpicePermissionManager	15
2.14	BlueSpiceRSSFeeder	15
2.15	BlueSpiceReaders	15
2.16	BlueSpiceSaferEdit	16
2.17	BlueSpiceUEModuleBookPDF	16
2.18	BlueSpiceUEModuleHTML	17
2.19	BlueSpiceUEModulePDF	17
2.20	BlueSpiceUniversalExport	18
2.21	BlueSpiceVisualEditorConnector	18
2.22	BlueSpiceWholsOnline	18
2.23	BlueSpiceExpiry	18
2.24	BlueSpiceReview	19
2.25	BlueSpiceReviewExtended	19
2.26	BlueSpiceFlaggedRevsConnector	19
2.27	BlueSpiceSocialBlog	20
2.28	BlueSpiceSocialTopics	21
2.29	BlueSpiceMatomoConnector	22
3	Related info	22


With the Config manager, a wiki user with *sysop* rights can manage BlueSpice wiki-wide settings in one place. In the [navigation](#), it is located under *Global navigations > Management > Config manager*. This link loads the page *Special:ConfigManager*.

Layout

Filter options

All settings can be accessed through the following filter options:

- **Feature:** group by type of functionality the setting belongs to (search, administration...)
- **Extension:** group by extension name
- **Package:** group by BlueSpice edition and services (BlueSpice free, BlueSpice pro, Matomo)

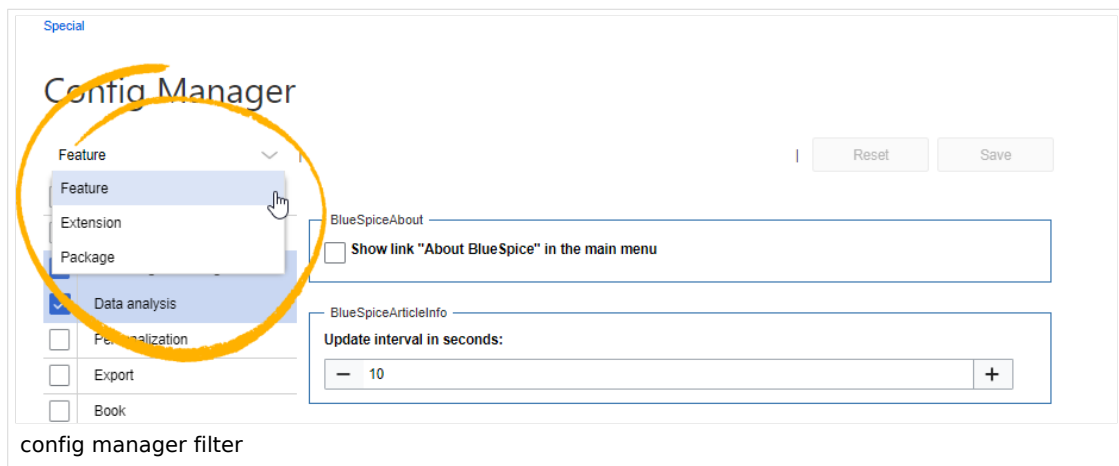

All settings are available in any type of grouping. Changing the grouping type does not add or remove setting options. It just groups them differently. After settings are adjusted, they can be saved by clicking *Save*, or cancelled by clicking *Reset*.

Note: If a server administrator has configured a setting to no longer be writable, it will be shown as greyed-out in the config manager. You will have to talk to your server administrator about changing such a setting.

Searching for settings

A search bar is located above the list of settings. Type in a keyword such as "logo" to find the corresponding setting. The search returns settings regardless of the currently selected group.

Note: The search field has to be empty if you want to see the filter menu instead of the search.

BlueSpiceFoundation

Logo path:

Config manager search box

Settings by extension


BlueSpiceFoundation

Updating logo and favicon


- **Logo path:** The logo image should be stored in the `/images` folder of your installation. If you store it in the `/skins` folder of your BlueSpice installation, it could be overwritten with an upgrade.

To upload the logo directly in the wiki:

1. **Upload** the logo on the page *Extended file list* (*Special:ExtendedFilelist*). This is a link under the *Global actions* navigation.
2. **Search** for the logo name in the extended file list.
3. **Click** on the thumbnail image of the logo. This opens the logo on a separate page.

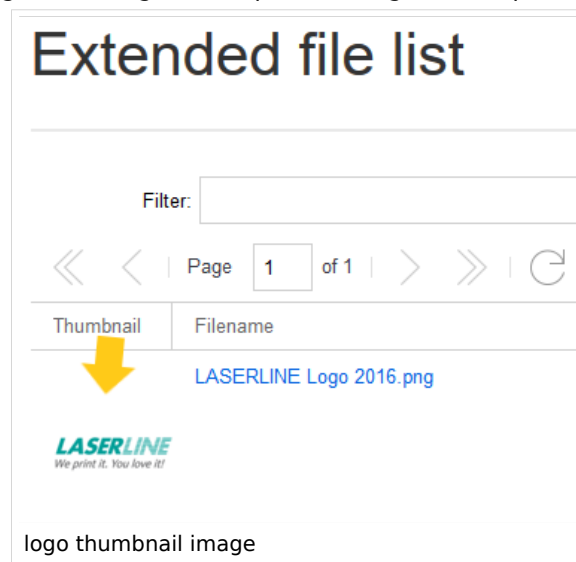

4. **Copy** the relative logo path from the address bar. In a typical Wiki configuration, this path starts with `/w/....`.

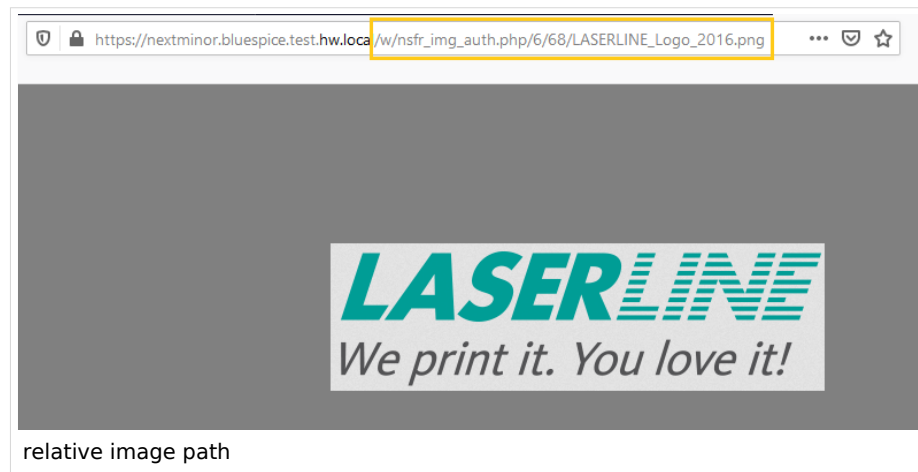

5. **Paste** the logo path into the text field for the logo.

Extension |

☒ BlueSpiceFoundation

☐ BlueSpiceAbout

☐ BlueSpiceArticleInfo

☐ BlueSpiceAuthors

Skimming

Logo path:

Favicon path:

logo path

6. **Click Save.**
7. **Refresh** the page (Strg+F5).
If the uploaded logo is too large, you can add the following code snippet to the page *MediaWiki:Common.css*. This automatically adjusts the image to the height of the main toolbar:

```
.bs-logo a {background-size: contain;}
```


- **Favicon path:** The favicon image should be stored in the */images* folder of your installation. If you store it in the */skins* folder of your BlueSpice installation, it could be overwritten with an upgrade. [Favicon images](#) have the file extension *.ico*.

System

- **Allowed file extensions:** For security reasons, the types of files that users can upload are restricted. Here, you can allow additional file formats. If a file format is blacklisted in the server configuration, adding this file extension here will not allow this file type to be uploaded. See mediawiki.org/wiki/Manual:Page_title for more info.
- **Allowed image extensions:** The standard web image types are listed here. In general, you want to restrict image uploads to web images. See developer.mozilla.org/en-US/docs/Web/Media/Formats/Image_types for more on browser-supported image types.

BlueSpiceAbout


- **Show link "About BlueSpice" in the main menu:** Shows or hides the link to the page [AboutBlueSpice](#) in the main navigation.

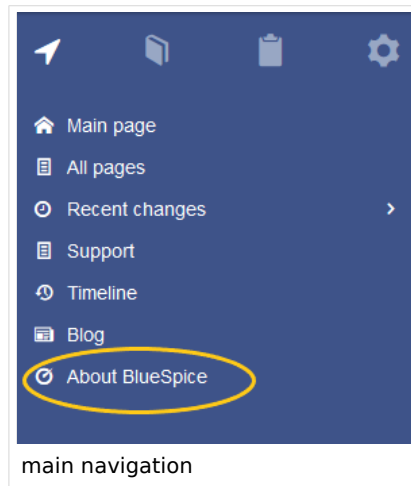

BlueSpiceArticleInfo

BlueSpiceArticleInfo, together with *BlueSpiceAuthors*, *BlueSpiceReaders*, and *BlueSpiceExtendedSearch* is part of the *Page information* in the quality management tools.


- **Update interval in seconds:** Sets the refresh rate for the "Last edit" value. By default, this date is updated every 10 seconds via JavaScript.

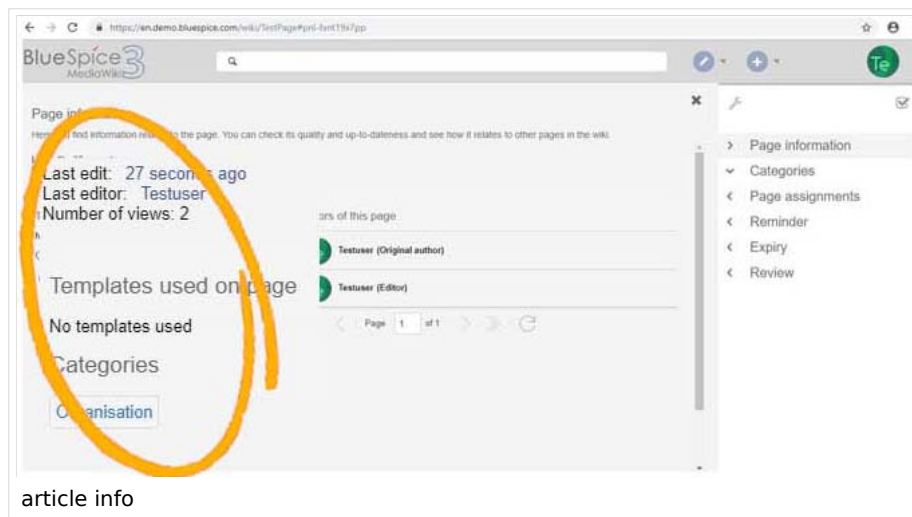

BlueSpiceAuthors

BlueSpiceAuthors, together with *BlueSpiceArticleInfo* and *BlueSpiceReaders*, is part of the *Page information* in the quality management tools.

- **Display authors:** Show or hide authors on the page information page.


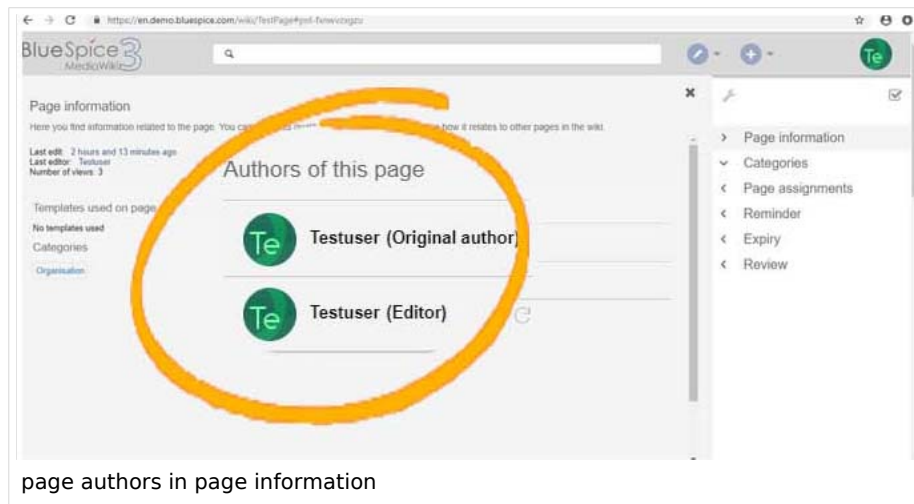


BlueSpiceAvatars

An avatar image is automatically generated if the user does not upload a profile picture or if the user decides to create an avatar image in the preferences.


- **Generator**

- **InstantAvatar:** Generates an avatar image based on using the initials of the Real name or the Username
- **Identicon:** Generates an avatar image based on parts of the user's IP address.

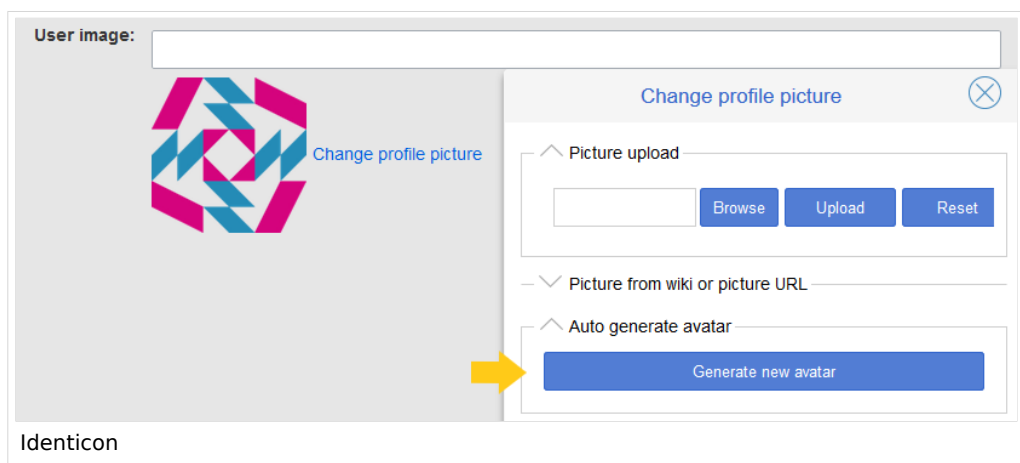


BlueSpiceBookshelf

- **Show book chapter pager after content:** Displays previous/next book page navigation at the end of each book page. (1)
- **Show book chapter pager before content:** Displays previous/next book page navigation at the beginning of each book page. (2)

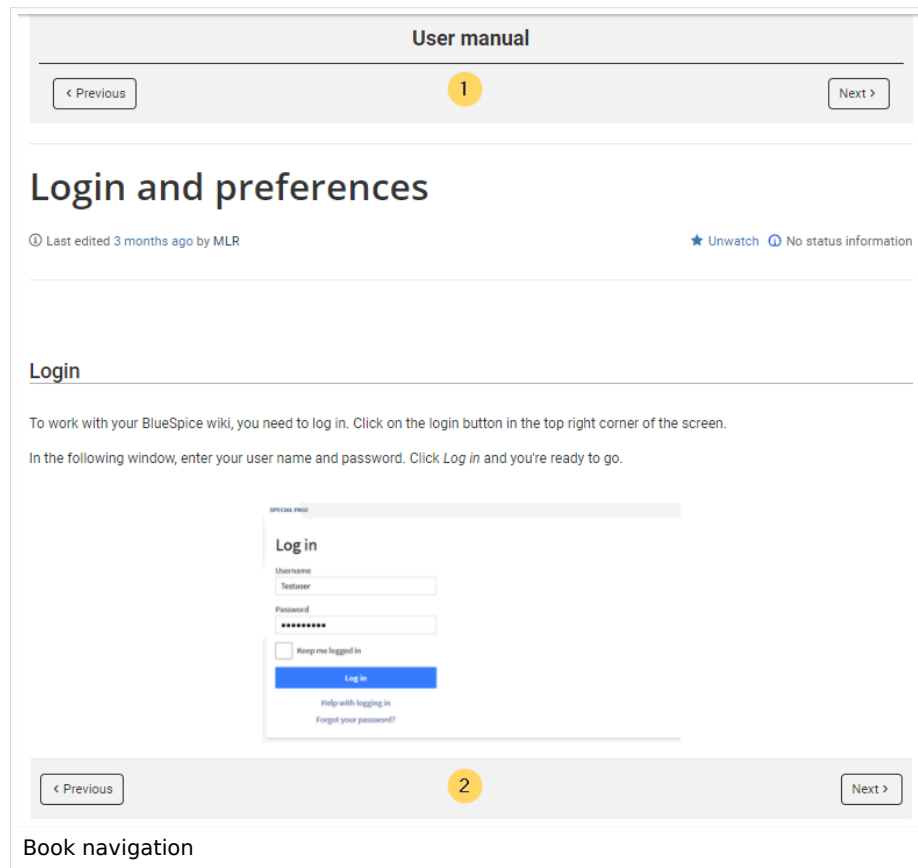

- **Use the display title from book source on article:** Shows the title from the book navigation as page title instead of the page name.

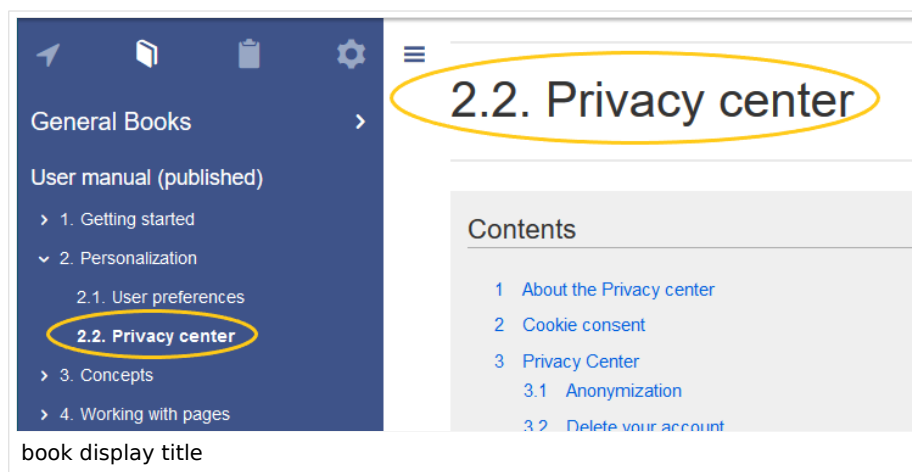


Note: If the page additionally contains a `{{DISPLAYTITLE}}` tag, the display title of the page is shown instead of the book title.

- Prepend article table of contents and headlines with book numbering
- Suppress namespace prefix of book articles in output

BlueSpiceChecklist

- **Mark checklist changes as minor edit:** If this setting is active, changes to a checklist (for example, checking a checkbox) in view mode are logged as minor edits. If this setting is inactive, a change to the checklist is recorded as a regular version in the page history.

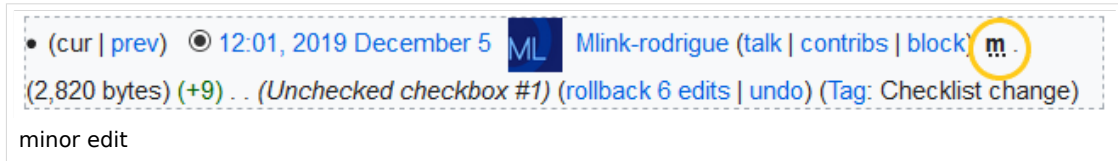


BlueSpiceExtendedSearch

- **External file paths:** External locations to scan for and index files from. These locations are entered in key/value pairs of Physical path and URL prefix.
 - *Physical path:* Storage path. For mounted drives, for example: *X:\Documents*
 - *URL prefix:* All files indexed from the indexed physical location are prefixed in the search results. It should be used if files are available from a web server. By default, the URL prefix is set to the same value as *Physical path*.


Examples for external file paths

Example file	Phys. Path	URL Prefix	Link in results list
S:\Sales\Info\glossaryy.pdf	S:\	file:///S:/	file:///S:/Sales/Info/glossary.pdf
		https://sharepoint/Sales/documents/	https://sharepoint/Sales/documents/Sales/Info/glossary.pdf
		https://intranet/showdocs inline.aspx?path=	https://intranet/showdocsinline.aspx? path=/Sales/Info/glossary.pdf
/var/www/bluespice/w/mounted_share/Sales/Info/glossary.pdf	/var/www/bluespice/w/mounted_share/		https://wiki.company.local/w/mounted_share/Sales/Info/glossary.pdf

- **Use simple autocomplete:** forces a more compact autocomplete (1-column Sales thumbnail preview).

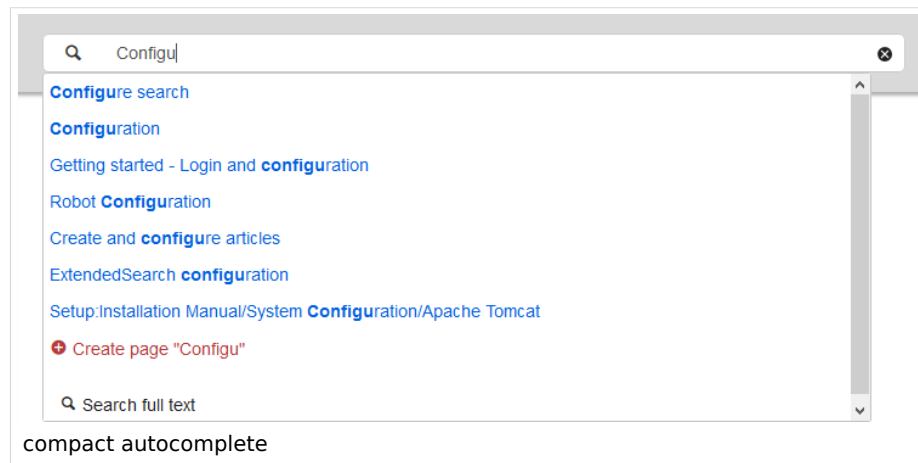

compact autocomplete

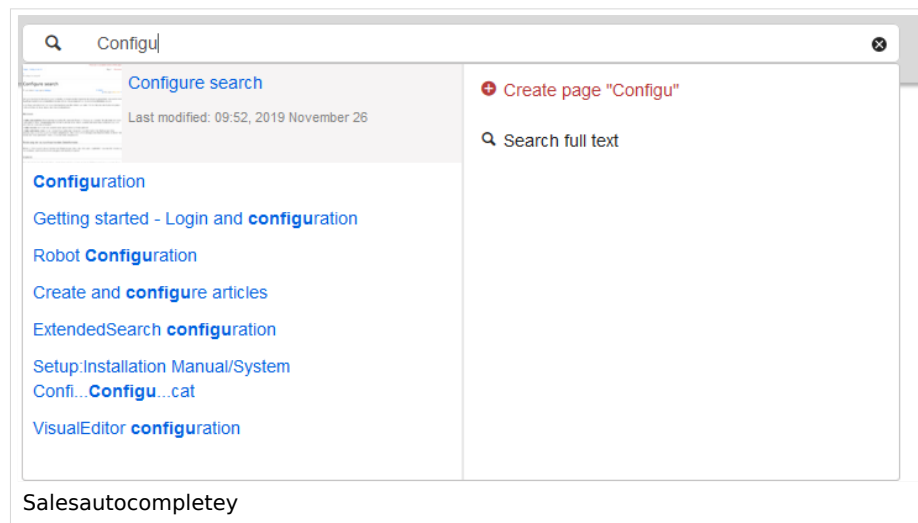

Salesautocomplete

- **Automatically set language filter:** This setting applies to multi-language. It returns search results for a user only in the user's language. Users can set their language in their [preferences](#).
- **Exclude patterns:** Files at external file locations can be excluded from search based on regular expression patterns.

BlueSpiceExtendedStatistics

- **Exclude these users:** Some user groups, like WikiSysop can skew the statistics, for example the statistics for search queries or because they complete automated maintenance tasks. These types of user groups can be excluded from the statistical results.
- **Maximum number of interval steps:** Sets the size of the x-axis for the results. For a few days, select the interval *Day* or *Calendar Week*, for periods over one year, select *Year* or *Month*. If you do not get any results for your query, try to adjust the interval accordingly.

BlueSpiceInsertCategory

- [Insert category with its parents](#)
- [Set page categories as default in upload dialog](#)

BlueSpiceInsertLink

- [Allow unmapped links](#)

- **Allowed locations for external files**
 - Filesystem prefix
 - Web accessible prefix:

BlueSpicePageTemplates


- **Force target namespace:**
- **Hide default templates:** Hides the default *Empty page* template.

BlueSpicePermissionManager

- **Backup limit:** Sets the number of backups for the permissions manager. Each time the page *Special:PermissionManager* is saved, a backup is created. If the backup limit is set to 5, the last five versions of the permissions configuration are saved as backups.

BlueSpiceRSSFeeder

- **URL whitelist:** RSS feeds need to be whitelisted here by an administrator before they can be displayed in a wiki page.
- **Maximum number of allowed redirects:** If there are URL redirects for any of the whitelisted URLs, the number of redirects needs to be adjusted (usually to 1 or 2).

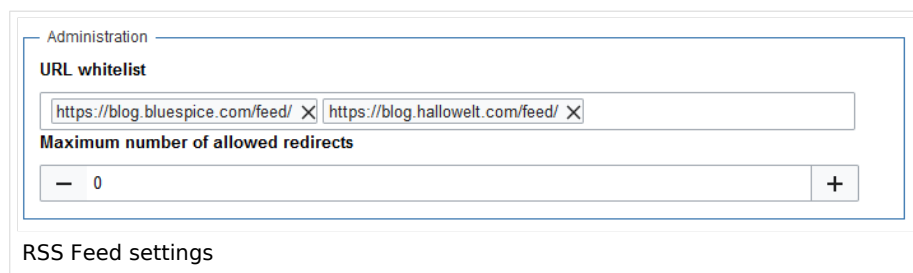

The screenshot shows the 'Administration' tab of the 'RSS Feed settings' interface. It contains two main sections: 'URL whitelist' and 'Maximum number of allowed redirects'. The 'URL whitelist' section has a text input field containing two URLs: 'https://blog.bluespice.com/feed/' and 'https://blog.hallowelt.com/feed/'. Each URL has a small 'X' icon to its right, indicating it can be removed. The 'Maximum number of allowed redirects' section has a numeric input field with the value '0' and a '+' button to its right, indicating it can be incremented.

BlueSpiceReaders

- **Number of readers to display:** Sets the number of readers that are displayed on the Page information in the Quality management tools.

Page information

Here you find information related to the page. You can check its quality and up-to-dateness and see how it relates to other pages in the wiki.

Last edit: one month ago
Last editor: Rodrigue
Number of views: 13315

Templates used on page

BSExtensionInfobox

Similar pages

BlueSpiceTagCloud BlueSpiceInsertFile BlueSpiceCategoryManager InsertImage
Extension/VisualEditor ServiceCenter BlueSpiceTagSearch BlueSpiceInsertLink PastelImage

Categories

BlueSpice free Extension

Readers of this page

WikiSysop
LukasHoenig
FlorianFuessl

page readers

Authors of this page

WikiSysop (Original author)

Mlink-rodrigue (Editor)

Fbaeckmann (Editor)

Lsireta (Editor)

RichardHeigl (Editor)

P technik (Editor)

IdaK (Editor)

Angelika (Editor)

BlueSpiceSaferEdit

- **Interval for lookup for concurrent editings:** Sets the time in seconds for checking if another person is editing the page.
- **Show name of current editor:** Shows or hides the name of the user who is currently editing the page.

BlueSpiceUEModuleBookPDF

- Table of Contents
 - *Only article titles (indent by grade):* Only shows the article titles in the main contents table of the PDF.

Table of contents	
1 Introduction	3
2 Wiki pages model	4
3 User rights	7
3.1 Group manager	15
3.2 Permission manager	18
3.3 User manager	24
4 Namespace manager	28

PDF table of contents without article TOCs

- *Embed article TOCs (No indent of article titles):* Shows the table of contents for each article in the main contents table of the PDF.

Table of contents	
1 Introduction	5
2 Wiki pages model	6
1 The pages modell	6
2 Page types	6
2.1 Special page	6
2.2 Content page	7
2.3 Wiki page	7
2.4 Category page	8
2.5 File / image (description) page	8
3 User rights	9
3.1 Group manager	17
1 Accessing the group manager	17
2 Functionality	18
3 Assigning roles and users to groups	18

Embed article TOCs

BlueSpiceUEModuleHTML

- **Hide namespace prefix in PDF:** If activated, the namespace is shown in the HTML main heading.

Note: If the page contains a "displaytitle" tag in the page source, the page display title is shown and this setting has no effect.

BlueSpiceUEModulePDF

- **Hide namespace prefix in PDF:** If activated, the namespace is shown in the PDF main heading for a page.

Manual: Extension/BlueSpiceGroupManager	
Contents	
1 Accessing the group manager	1
2 Functionality	1
3 Assigning roles and users to groups	2
4 Related info	2

namespace in heading

Note: If the page contains a "displaytitle" tag in the page source, the page display title is shown and this setting has no effect.

BlueSpiceUniversalExport

- **Metadata (standard, JSON):** Additional data to be passed to the rendering template in JSON format. This data can be used in the export template. The template itself is maintained server-side.
- **Metadata (override, JSON):** Allows overriding standard data sent to the rendering template in JSON format. Values that are set by default can be overridden with this option.

BlueSpiceVisualEditorConnector


- **Enable VisualEditor for BlueSpice extensions**
- **Configuration variable to use a simplified save process**
- **Upload type**
 - Original (Here a confirmation of the rights of use/upload is obtained, file name and namespace of the file can be changed, a category can be assigned and a description of the file MUST be given).
 - Simple (No confirmation of required rights is obtained here, the name and namespace of the file can be changed, a description and a category can be assigned, but does not have to be specified)
 - One click (No confirmation about required rights is obtained here, the image cannot be renamed and no category can be assigned. Only the namespace can, but does not have to be adjusted before uploading)

BlueSpiceWholsOnline

- **Time in seconds until a user is marked as offline:** The system checks every x seconds if a user logged out and no longer displayed as online. This can be less frequent than the update interval for newly logged-in users.
- **Update interval in seconds:** The system checks every x seconds for users.

BlueSpiceExpiry

- **Show watermark for expired pages in PDF:** Shows the watermark for expired pages in PDFs.
- **Show watermark for expired pages in print version:** Shows the watermark for expired pages when a page is printed.
- **Show watermark for expired pages:** Shows a watermark on the page itself.

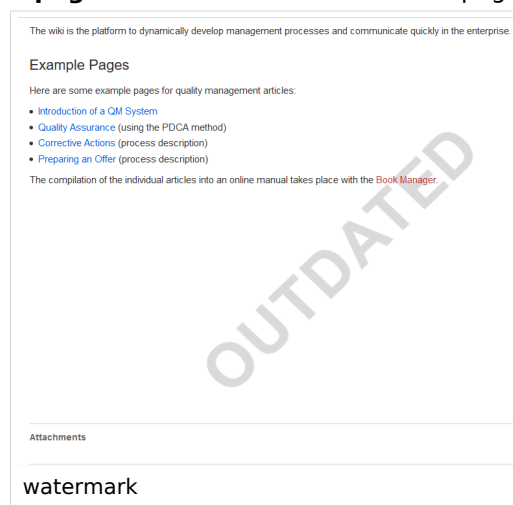

BlueSpiceReview

- **Only the owner of a review can change it:** If this is unchecked, any user with edit rights can update a workflow.

BlueSpiceReviewExtended

- **Workflow will be added to page history:** This enables that workflow votes are listed under the page history with the corresponding version.

• (cur | prev) • 15:00, 17 September 2019 FB Fbaeckmann (talk | contribs | block) m... (802 bytes) (+5) ... (Text replacement - "edition=BlueSpice |active" to "edition=BlueSpice free |active")

1. 👁 Mlink | 14:22, 9 December 2019 | Type: Flagging | "*Rodrigue*: first reviewer ⇒ *Mlink*: Everything is correct."
2. 👁 Helpdesk | 14:47, 9 December 2019 | Type: Flagging | "*Rodrigue*: all content ⇒ *Helpdesk*: Info about configuration is incorrect. Get with John from It. He should have the latest info."

[Reviewed: 14:22, 9 December 2019 | Mlink]

workflow log entries in page history

BlueSpiceFlaggedRevsConnector

Export

The export settings affect how the pages of a book are generated in the PDF export.

- **Bookshelf: List accepted revisions log:** Shows a log of stable page versions of pages in the PDF and when these pages were put into accepted status. If editors did not provide a comment when accepting the page, the *Stable comment* field for a revision is empty.

Stable date	Page	Stable comment
18.11.2019	Permission matrix	
18.11.2019	Permission matrix	
15.11.2019	Wiki pages model	
14.11.2019	Permission manager	
14.11.2019	Group manager	

accepted revisions log


- **Bookshelf: List pages without stable revision:** Displays a list of PDF pages at the beginning of the PDF that only exist as a first draft and have no released version.

Not stable pages


QM:Checklists

Pages without acceptance feature

- **Bookshelf: List pages without FlaggedRevs:** Displays a list of PDF pages that do not have a release mechanism at the beginning of the PDF.

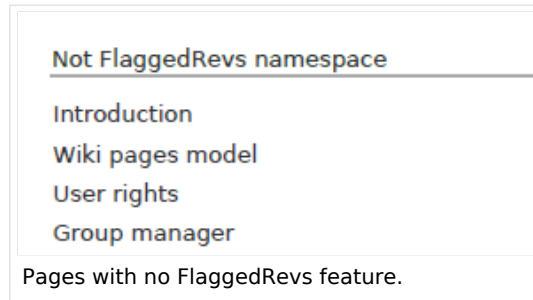

- **UEModulePDF: Show FlaggedRevs info below main heading:** Prints the latest revision dates (last acceptance and last edit date) below the heading.

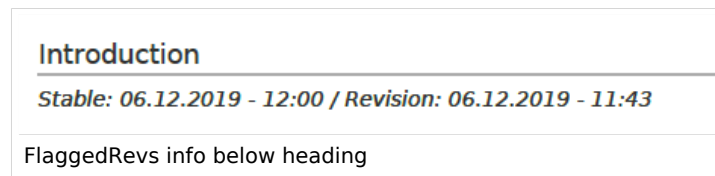

Quality assurance


- **Automatically set the page to stable, when the workflow was finished successfully:** The workflow ends with setting the page status to stable. (this setting is available until version 3.1)
- **Automatically delete the workflow, when a page was marked as stable:** The workflow is deleted.
- **Show unstable pages for following groups:** If the group *user* is removed from the *BlueSpiceFlaggedRevs* configuration, users in this group will not be able to see draft versions when they are added as reviewers in a review process. When the group user is removed, only *sysop* and *reviewer* users can access drafts. If you want other groups, for example *editor*, to see draft versions, you need to add them to the configuration. If no user groups are specified in the configuration field, not even reviewers and sysops users will see a visual status indication of a page. They will have access to drafts through the revision history for the page instead.

Searching and Navigation

- **Indexing only stable versions:** Draft versions are excluded from the search results. If a page does not have a stable version, it is not shown as a search result.

BlueSpiceSocialBlog

- **Use teaser text for blog entries in the timeline:** When you create a blog entry, you can create a teaser text for it by clicking the cogwheel symbol in the blog entry form. If this setting is active, the teaser text will be shown on the page *Special:Timeline* instead of the first part of the content.

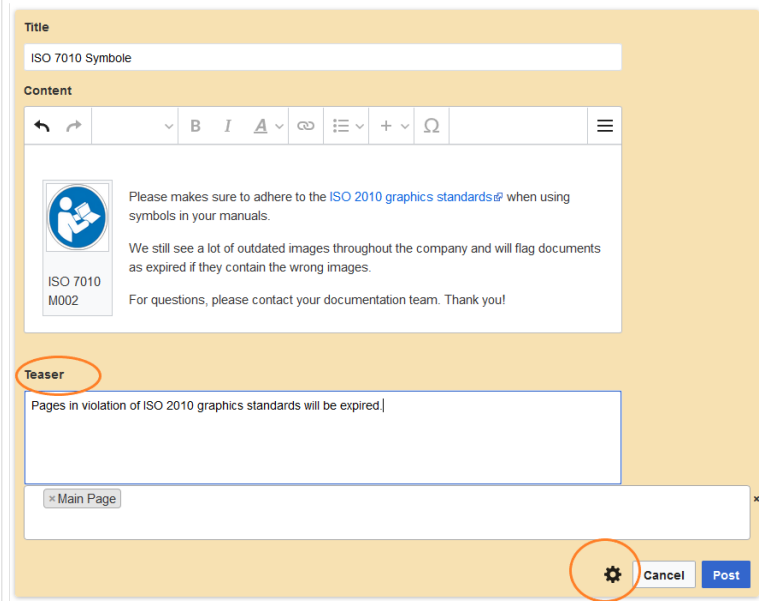

Title
ISO 7010 Symbole

Content

Please makes sure to adhere to the [ISO 2010 graphics standards](#) when using symbols in your manuals.

We still see a lot of outdated images throughout the company and will flag documents as expired if they contain the wrong images.

For questions, please contact your documentation team. Thank you!

Teaser

Pages in violation of ISO 2010 graphics standards will be expired.


[Main Page](#)

[Cancel](#) [Post](#)

blog teaser text

BlueSpiceSocialTopics

- **Automatically create all discussion pages.** If a user creates the first discussion topic for a page using the link in the page footer of a wiki page, the needed discussion page is automatically created first.

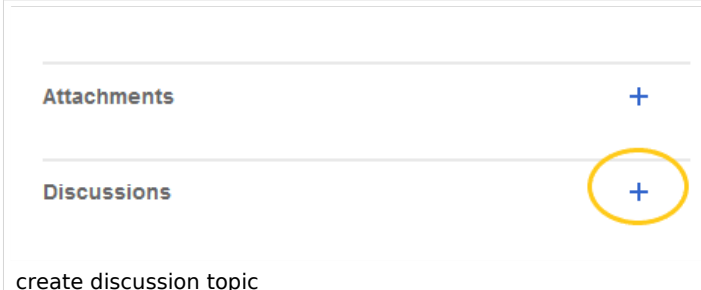


Attachments [+](#)

Discussions [+](#)

create discussion topic

A message "This discussion page was created automatically" is inserted on the discussion page.

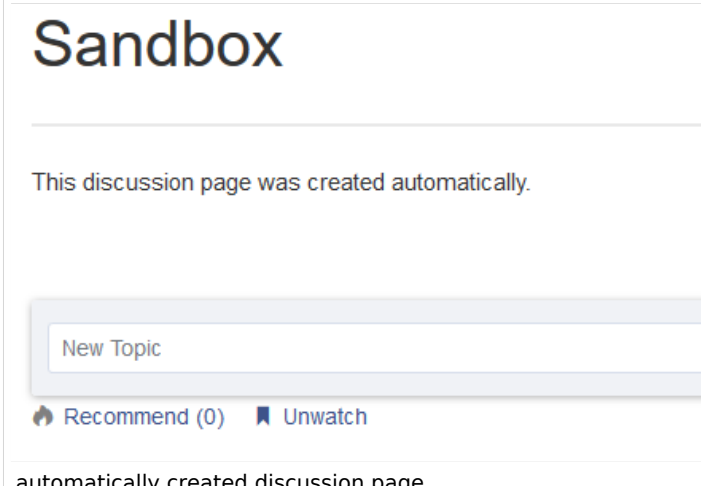

Sandbox

This discussion page was created automatically.

[New Topic](#)


[Recommend \(0\)](#) [Unwatch](#)

automatically created discussion page


If this setting is deactivated, the user is directed to the "Create page" default page first

BlueSpiceMatomoConnector


- **Site ID:** Matomo ID of the wiki. You can find the site ID as a url parameter in the browser address bar when you are logged into Matomo.



- **Base url:** The url to your Matomo installation.
- **Show opt-out link in footer:** Displays a link in your wiki footer, usually named *Analysis service*.

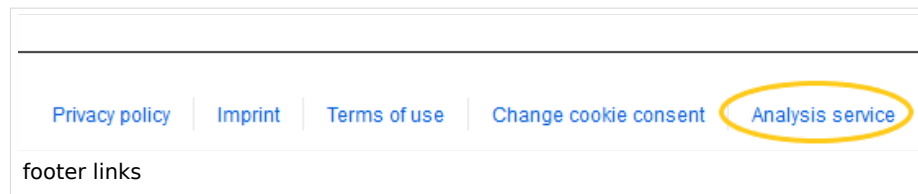

On the Analysis service page, there is a checkbox that allows a user to opt-out from being tracked for analysis purposes.

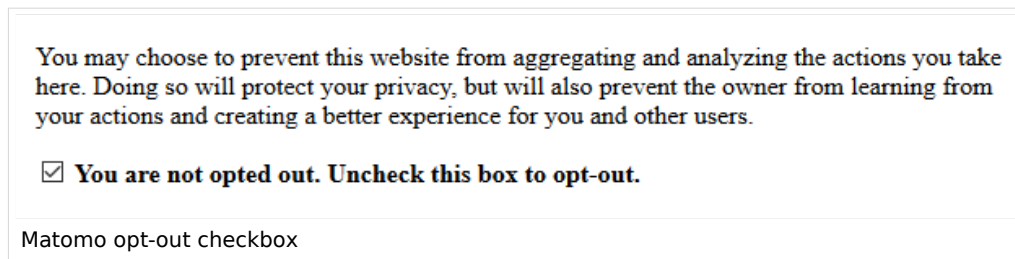

Related info

- [Reference:ConfigManager](#)

Setting reminders

A [quality version](#) of this page, [approved](#) on *28 July 2020*, was based off this revision.

The extension **Reminder** allows users to keep track of pages by creating reminders for a particular date.

Contents

1 [Setting a reminder](#) 24

2 [Manage reminders](#) 24

3 [My reminders](#) 25

4 [Related info](#) 25

Setting a reminder

Reminders are set in the quality management tab of the [page tools](#). The date can be set as a recurring event. It is a good idea to add some text in the comments page so that the list of all reminders on the wiki provides some context for each reminder. If other users have also set a reminder for the page, they are shown on the reminder flyout as well.

Reminder

You can set a reminder for this page here. On the specified date, you will get notified according to your notification settings.

There are no upcoming reminders for this page

Create a reminder

19.07.2020

☒ Repeat

Repeat every

1

+

—

year(s)

Repeat ends on: 20.07.2020

Lydia Willis

Review images

Save

Reset

Manage reminders

My reminders

Other user's reminder

 2019-10-24 Cosborne

Page 1 of 1

Setting a reminder

From the bottom of the page, users can load the pages *Manage reminders* and *My reminders*.

Manage reminders

Available only for wiki admins , the page *Special:Reminder* shows a list of all reminders for all pages and all users. Wiki admins can delete reminders or edit the due date and other details.

The screenshot shows the BlueSpice3 Reminder manager interface. The left sidebar contains 'Global actions' and 'Management' sections. The main content area is titled 'Reminder' and displays a table of reminders. The table has columns for 'User', 'Page', 'Remind on', 'Comment', and 'Actions'. The table shows 11 reminders, with the first one being 'Mary Read' on 'Staff Hours of Work' and the last one being 'WikiSysop' on 'QM Preparing an offer'. The interface includes a search bar, a 'Export table' button, and a pagination bar at the bottom.

User	Page	Remind on	Comment	Actions
Mary Read	Staff Hours of Work	2020-11-11	Please check legal changes	
WikiSysop	QM Retention period	2020-10-07		
Testuser	Staff Data Protection and Ac...	2019-10-30		
Testuser	TestPage	2019-01-29	Remind me to check in on t...	
Richard-Heigl	Test functions/Navigation	2018-08-12	Comments on Beta Testing t...	
Richard-Heigl	Test functions/Navigation	2018-08-12	Notes on Beta testing to be ...	
Richard-Heigl	Test functions/Skinning and ...	2018-08-12	Notes on Beta Testing to be ...	
Richard-Heigl	Test functions	2018-07-16	Add explanations	
SabineGuerlier	QM Competencies	2018-07-16	SmokeTest	
Angle	Wiki Software 1.0	2018-07-11		
WikiSysop	QM Preparing an offer	2017-03-01		

Displaying 1 - 11 of 11

Privacy policy About BlueSpice Disclaimers Analysis service

MediaWiki BlueSpice Semantic MediaWiki

Reminder manager for wiki admins

My reminders

The page *Special:Reminder/USER_NAME* shows the reminders for the currently logged-in user. It has the same functionality as "Manage reminders", just in the scope of the current user.

The screenshot shows the BlueSpice3 Reminder manager interface for a user. The left sidebar contains 'Global actions' and 'Management' sections. The main content area is titled 'Reminder' and displays a table of reminders. The table has columns for 'User', 'Page', 'Remind on', 'Comment', and 'Actions'. The table shows 2 reminders, with the first one being 'WikiSysop' on 'QM Retention period' and the second one being 'WikiSysop' on 'QM Preparing an offer'. The interface includes a search bar, a 'Export table' button, and a pagination bar at the bottom.

User	Page	Remind on	Comment	Actions
WikiSysop	QM Retention period	2020-10-07		
WikiSysop	QM Preparing an offer	2017-03-01		

Displaying 1 - 2 of 2

Privacy policy About BlueSpice Disclaimers Analysis service

MediaWiki BlueSpice Semantic MediaWiki

My reminders

Related info

- [Reference:BlueSpiceReminder](#)

Quality assurance



Quality

Automate the life cycle of your information. Your wiki will notify everyone at the right time.

Quality management

- [CategoryCheck](#)
- [Create a review](#)
- [Expiry](#)
- [Page approvals \(Acceptance\)](#)
- [Page assignments](#)
- [Quality management](#)
- [Quality management overview page](#)
- [Read confirmation](#)
- [Redirects](#)
- [Review workflow](#)
- [Setting reminders](#)
- [WikiExplorer](#)

Maintenance

- [About maintenance](#)
- [Extended file list](#)
- [Special pages](#)
- [Special pages filter](#)
- [Watchlist](#)

Reference:BlueSpiceExpiry

Extension\ BlueSpiceExpiry

Overview	
Description:	Pages can be marked as expired.

Overview			
State:	stable	Dependency:	BlueSpice
Developer:	HalloWelt	License:	GPL-3.0-onlyProperty "BSExtensionInfoLicense" (as page type) with input value " GPL-3.0-only" contains invalid characters or is incomplete and therefore can cause unexpected results during a query or annotation process.
Type:	BlueSpice	Category:	Quality Assurance
Edition:	BlueSpice pro, BlueSpice Farm, BlueSpice Cloud		
View help page			

Features

Expiry marks — after a certain period of time — a chosen article as "obsolete". The article can be updated by editing or by confirming that the article is still up-to-date. Expiry is the ideal basis for an archiving system. Outdated articles can be moved to an archive after being queried.

- An author can add an expiration date to an article.
- The expiry date can automatically be postponed to the future for a specific period of time.
- Several authors: There can only be one expiration date. The user who originally entered the expiration date will be informed of the change.
- There is no limit to the number of expiration dates with respect to users.

Technical Information

This information applies to BlueSpice 3 . Technical details for BlueSpice cloud can differ in some cases.

Requirements

MediaWiki: 1.31

BlueSpiceFoundation: 3.2

- BlueSpiceReminder: 3.2

Integrates into

- BlueSpiceEchoConnector
- BlueSpiceReminder
- BlueSpiceSMWConnector

Special pages

- Expiry

Permissions

Name	Description	Role
expirearticle	Expire pages	admin, editor, maintenanceadmin
expiry-delete	Remove expiration from pages	admin, editor, maintenanceadmin

Configuration

Name	Value
ExpiryEnablePDFWatermark	true
ExpiryEnablePageWatermark	true
ExpiryEnablePrintWatermark	true

API Modules

- bs-expiry-store
- bs-expiry-tasks

Hooks

- [BSUEModulePDFBeforeAddingStyleBlocks](#)
- [BSUEModulePDFgetPage](#)
- [BeforePageDisplay](#)
- [LoadExtensionSchemaUpdates](#)
- [SkinTemplateNavigation](#)
- [SkinTemplateOutputPageBeforeExec](#)
- [wgQueryPages](#)