

Contents

1. Manual:Extension/PageAccess	2
2. Manual:Extension/BlueSpicePageAccess	2

Manual:Extension/PageAccess

Redirect to:

- [Manual:Extension/BlueSpicePageAccess](#)

Page access restrictions

A [quality version](#) of this page, [approved](#) on *28 July 2020*, was based off this revision.

BlueSpicePageAccess restricts access to a page to specified user groups. It is inserted with the tag *pageaccess*. Access restriction per page is done on a group basis. "Access" here means all actions, including read and edit.

Contents


1	How to restrict access to a page	3
2	Related info	4

How to restrict access to a page

Users who have the necessary permissions (by default through the roles *admin*, *maintenanceadmin*, and *structuremanager*) can add the necessary instruction to a page.

To add this tag with **VisualEditor**:

1. **Position** the cursor at the beginning of your page.
2. **Select** *Insert > Magic word*.
3. **Select** *Page access* in the dialog box.
4. **Click** *Done*.
5. **Add** the groups to the Page access dialog box.
6. **Click** *Insert*.

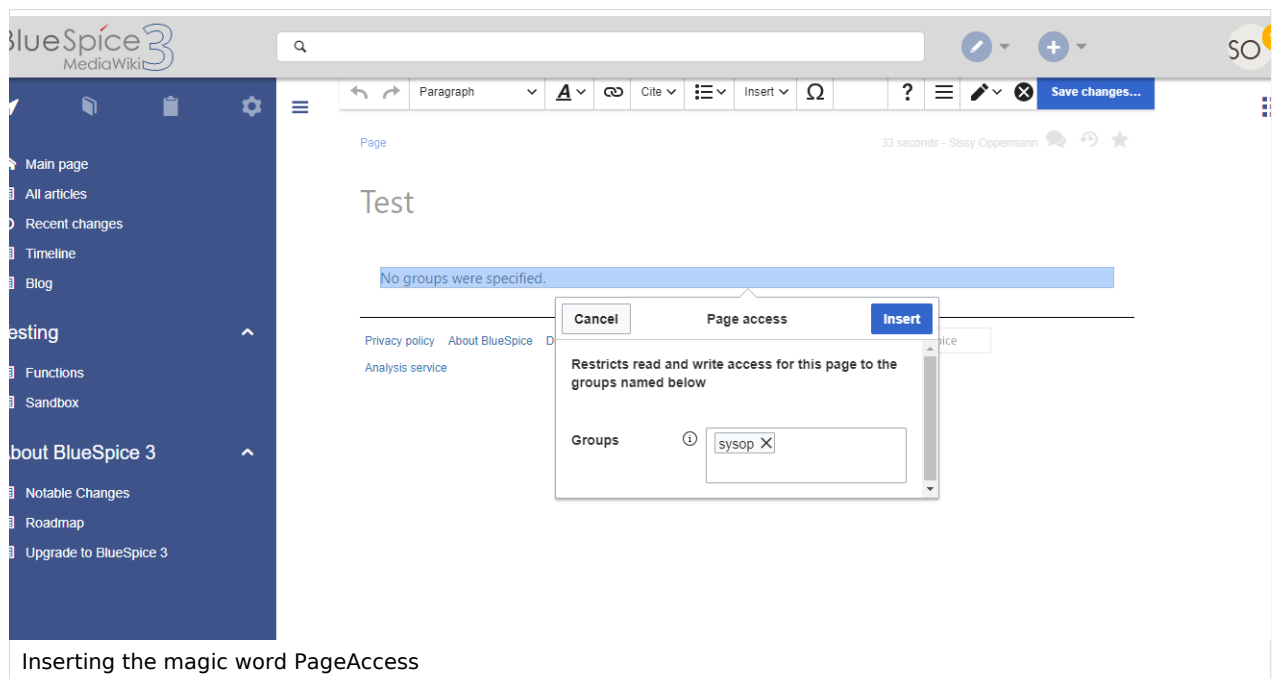

The page now displays an info header that shows the groups that have access to the page.

Access to this page is restricted to the group **sysop**.

In source view, the tag looks like this:

```
<bs:pageaccess groups="sysop" />
```

To add more groups, use commas to separate:

```
<bs:pageaccess groups="sysop,secure1,secure2" />
```

A user can only restrict access to the groups this user belongs to. This is a security feature to prevent users from locking themselves out of a page.

Related info

- [Reference:BlueSpicePageAccess](#)