

Contents

1. Manual:MagicWords	2
2. Manual:MagicWords/List	5
3. Manual:MagicWords/Tags	5
4. Manual:MagicWords/new	11

Manual:MagicWords

A [quality version](#) of this page, [approved](#) on *23 November 2020*, was based off this revision.

A "magic word" is a string of text that is recognized by the MediaWiki software. It triggers the software to return the value of a function, such as dates, website statistics or page names.

Contents

1	Types of magic words	3
2	The 4 types of MagicWords	3
2.1	Behavior switch	3
2.1.1	Characteristics of a behavior switch	3
2.1.2	Description	3
2.2	Variable	3
2.2.1	Characteristics of a variable	3
2.2.2	Description	3
2.3	Parser Function	3
2.3.1	Characteristics of a parser function	3
2.3.2	Description	3
2.4	Tag	4
2.4.1	Characteristics of a tag	4
2.4.2	Description	4
3	How to add a magic word	4
4	Related info	5

Types of magic words

- **Behavior switch** (or "Double underscore"): `__TOC__`
- **Variable**: `{{FULLPAGENAME}}`
- **Tag**: `<gallery>`
- **Parser function**: `{{#ifeq:x|y|true|false}}`

The 4 types of MagicWords

Behavior switch

Characteristics of a behavior switch

- **Purpose**: controls the layout or behavior of the page
- **Syntax**: `__NOTOC__`

Description

A behavior switch includes or omits certain elements of the page. It is also known as "double underscore". Behavior switches can be put anywhere in the source code of the designated page (usually at the end of the page). The behavior switch `__TOC__` produces as output the table of contents exactly where it was inserted on the page.====

Variable

Characteristics of a variable

- **Purpose**: returns information about the page, wiki, or date
- **Syntax**: `{{PAGENAME}}`

Description

Variables contain (simple) dynamic data. If a template name conflicts with a variable, the variable is used. For example, you have the variable `{{PAGENAME}}`. In that case, you have to transclude the template with the same name as `{{Template:PAGENAME}}`.

Parser Function

Characteristics of a parser function

- **Purpose**: simple "programming language" for page content (mainly in templates)
- **Syntax**: `{{#if:{{{field|}}} | {{{field|}}} | N/A }}`

Description

Parser functions are similar to variables, but take one or more parameters.Example:

```
{{#ifeq:{{type}}|warning  
|This is a warning!  
|  
}}
```

They are used for simple logic only, since they are hard to read and to maintain on a larger scale. If complex logic is required, consider Lua scripts in the "Module" namespace (mediawiki.org/wiki/Extension:Scribunto) and invoke using `{{#invoke:...}}`

Parser functions can also be "tag-like", e.g. `{{#ask:...}}` from SemanticMediaWiki. For more information, refer to the MediaWiki help pages mediawiki.org/wiki/Help:Extension:ParserFunctions and mediawiki.org/wiki/Help:Magic_words#Parser_functions.

Tag

Characteristics of a tag


- **Purpose:** often used for custom development to process dynamic content
- **Syntax:** `<smartlist />`

Description

Tags are implemented in PHP as part of a MediaWiki extension. Tags with "bs:" prefix come from BlueSpice (see [Reference:BlueSpiceTagSearch](#)). All others come from MediaWiki or from third-party extensions, e.g. the extension [SyntaxHighlight](#).

How to add a magic word

Magic words are inserted directly in the source code. Some frequently used magic words can also be added directly with the VisualEditor *Insert > Magic word* menu item:

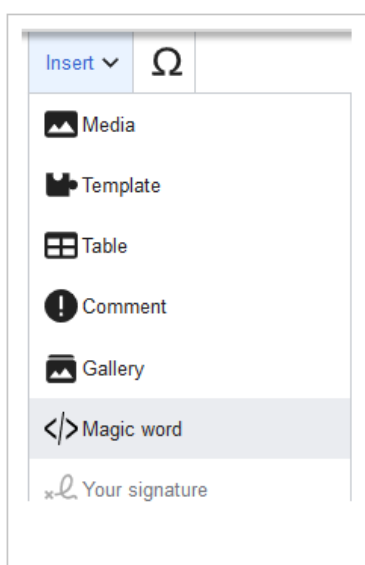

Related info

- mediawiki.org/wiki/Help:Magic_words
- [Extension:BlueSpiceInsertMagic](#)

Manual:MagicWords/List

Redirect to:

- [Manual:MagicWords/Tags](#)

Manual:MagicWords/Tags

A [quality version](#) of this page, [approved](#) on *23 July 2020*, was based off this revision.

This is a list of BlueSpice parser functions. Some of these tags can be inserted using VisualEditor. Go to *Insert > Magic words* and select the magic word you want to use. If you don't see the tag listed, switch to source editing mode and manually insert the tag there. You can always find the list of all parser tags (both MediaWiki and BlueSpice) in your BlueSpice installation on the page *Special:Version*, in the section *Parser Extension Tags*.

Contents

1	activitystream	7
2	booklist	7
3	bookmeta	7
4	bookshelf	7
5	checklist	7
6	countarticles	7
7	countcharacters	8
8	countfiles	8
9	countusers	8
10	drawio	8
11	newbies	8
12	pageaccess	8
13	pagesvisited	8
14	pagetemplates	9
15	pdfpagebreak	9
16	profileimage	9
17	showtime	9
18	signhere	9
19	smartlist	9

20 tagcloud	9
21 tagsearch	10
22 timeline	10
23 toplist	10
24 universalexportexcludearticle	10
25 universalexporthidetitle	10
26 universalexportmeta	10
27 universalexportnoexport	10
28 universalexportpagebreak	11
29 universalexportparams	11
30 watchlist	11
31 whoisonlinecount	11
32 whoisonlinepopup	11
33 Related info	11

activitystream

Description: Generates lists of recently changed social entities of a user, such as comments or blog entries.

Example: `<bs:activitystream user="WikiSysop" />`

booklist

Description: Generates lists of articles from the namespace "book" and can be filtered. The indication of the filter ist mandatory.

Example: `<bs:booklist filter="title:handbook|responsible:Testuser" />`

Extension: [BlueSpiceBookshelf](#)

bookmeta

Description: Tag for saving various meta data on book articles. These are included in the book. The attributes of this tag have to correlate with the meta data of the book article.

Example: `<bs:bookmetatitle="Installation manual" subtitle="BlueSpice pro" author1="Hallo Welt!" version="1.0" />`

Extension: [BlueSpiceBookshelf](#)

bookshelf

Description: Inserts the chapter navigation of a book in a page that is not part of a book. Numbering is automatically created according to the table of contents.

Example: `<bs:bookshelf src="Book:Installation manual" width="200" height="100" float="left" />`

Extension: [BlueSpiceBookshelf](#)

checklist

Description: Generates a checkbox or a select menu. The checklist can be modified by various parameters.

Example: `<bs:checklist type="list" value="false" list="Status" /><option>-</option><option>-</option></select>`

Extension: [BlueSpiceChecklist](#)

countarticles

Description: Displays the number of articles in the wiki.

Example: `<bs:countarticles />`

Extension: [BlueSpiceCountThings](#)

countcharacters

Description: Generates metadata about the number of characters, words or number of printed pages for the page.

Example: `<bs:countcharacters mode="chars">ARTICLENAME</bs:countcharacters>`

Extension: [BlueSpiceCountThings](#)

countfiles

Description: Shows the number of all uploaded files

Example: `<bs:countfiles />`

Extension: [BlueSpiceCountThings](#)

countusers

Description: Shows the number of registered users.

Example: `<bs:countusers />`

Extension: [BlueSpiceCountThings](#)

drawio

Description: Inserts the draw.io flow chart editor and allows inline editing of charts and diagrams.

Example: `<bs:drawio name="Diagram.png" />`

Extension: [DrawioEditor](#)

newbies

Description: Shows the new users of the wiki. The list can be restricted to a certain number.

Example: `<bs:newbies count="3" />`

Extension: [BlueSpiceSmartList](#)

pageaccess

Description: Defines the groups which have exclusive access to a page. Several groups are separated by commas.

Example: `<bs:pageaccess groups="sysop"/>`

Extension: [BlueSpicePageAccess](#)

pagesvisited

Description: Shows a list of recently visited pages. This list can be restricted by parameters.

Example: `<bs:pagesvisited count="7" maxtitlelength="40" />`

Extension: [BlueSpicePagesVisited](#)

pagetemplates

Description: Shows a list of the wiki's page templates.

Example: `<bs:pagetemplates />`

Extension: [BlueSpicePageTemplates](#)

pdfpagebreak

Description: Inserts a page break when the page is exported to PDF.

Example: `<bs:pdfpagebreak />`

profileimage

Description: Inserts the profile picture of the user on a page.

Example: `<bs:profileimage username="WikiSysop" />`

Extension: [BlueSpiceAvatars](#)

showtime

Description: Embeds a video that was uploaded to the wiki on a wiki page.

Example: `<bs:showtime width="960" height="760">myvideo.mp4</bs:showtime>`

Extension: [BlueSpicePlayer](#)

signhere

Description: Embeds a visual signature function on a regular wiki page.

Tag: `<bs:signhere />`

Extension: [BlueSpiceSignHere](#)

smartlist

Description: Shows a list of pages. The configuration works through several modi and parameters.

Example: `<bs:smartlist mode="whatlinkshere" traget="ARTICLENAME" />`

Extension: [BlueSpiceSmartList](#)

tagcloud

Description: Shows a tag cloud on a page.

Example: `<bs:tagcloud count="10" minsize="12" maxsize="34" exclude="Imported vocabulary, Project" />`

Extension: [BlueSpiceTagCloud](#)

tagsearch

Description: This function integrates the search form in an article. Search can be configured by parameters.

Example: `<bs:tagsearch cat="Help" ns="BlueSpice" operator="OR" />`

Extension: [BlueSpiceTagSearch](#)

timeline

Description: Shows a list of latest social contributions, such as discussion topics, blog entries, or user profile changes.

Example: `<bs:toplist count="4" cat="Wiki" period="month" />`

Extension: [BlueSpiceSocial](#)

toplist

Description: Shows the most visited pages. Can be limited by several parameters.

Example: `<bs:toplist count="4" cat="Wiki" period="month" />`

Extension: [BlueSpiceSmartList](#)

universalexportexcludearticle

Description: Excludes an article from a PDF export.

Example: `<bs:ueexcludearticle" />`

Extension: [BlueSpiceUniversalExport](#)

universalexporthidetitle

Description: Allows to add arbitrary meta data to an exported document.

Example: `<bs:uemeta department="IT" security="high" />`

Extension: [BlueSpiceUniversalExport](#)

universalexportmeta

Description: Allows to add arbitrary meta data to an exported document.

Example: `<bs:uemeta department="IT" security="high" />`

Extension: [BlueSpiceUniversalExport](#)

universalexportnoexport

Description: Content inside this tag will not be exported.

Example: `<bs:uenoexport>Not included in export</bs:uenoexport>`

Extension: [BlueSpiceUniversalExport](#)

universalexportpagebreak

Description: If supported by chosen export module, this tag forces a page break in the export document.

Tag: `<bs:uepagebreak />`

Extension: [BlueSpiceUniversalExport](#)

universalexportparams

Description: Allows to set special parameters for export, whether the parameter will be evaluated depends on the chosen export module.

Example: `<bs:ueparams template="BlueSpice Landscape" />`

Extension: [UniversalExport](#)

watchlist

Description: Shows the articles which have most recent changes and are on your watchlist.

Tag: `<bs:watchlist />`

Extension: [BlueSpiceWatchList](#)

whoisonlinecount

Description: Shows the number of users who have logged in within the last 10 minutes.

Example: `<bs:whoisonlinecount />`

Extension: [BlueSpiceWholsOnline](#)

whoisonlinepopup

Description: Shows all users who have been logged in within the last 10 minutes. The output is a speech bubble when a user hovers over the related link.

Example: `<bs:whoisonlinepopup anchortext="Online users" />`

Extension: [BlueSpiceWholsOnline](#)

Related info

- mediawiki.org/wiki/Help:Magic_words

Manual:MagicWords/new

Redirect to:

- [Manual:MagicWords/list](#)