


Contents

1. Manual:Semantic MediaWiki/Examples/Customer data/Form	2
2. Manual:Semantic MediaWiki/Examples/Customer data/Form edit mode	5
3. Manual:Semantic MediaWiki/Examples/Customer data/Template styling	8

2.3 Manual:Semantic MediaWiki/Examples/Customer data /Form

A [quality version](#) of this page, [approved](#) on *22 December 2020*, was based off this revision.

With the page *Special:CreateForm*, we now create the data entry form.

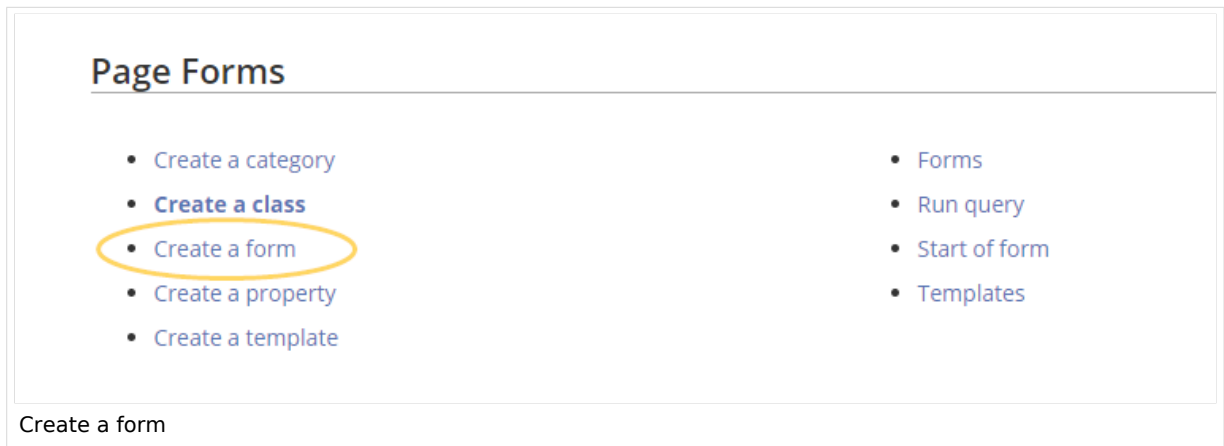

Page Forms

- [Create a category](#)
- [Create a class](#)
- [Create a form](#)
- [Create a property](#)
- [Create a template](#)


- [Forms](#)
- [Run query](#)
- [Start of form](#)
- [Templates](#)

Create a form

Creating the form

1

On the "Create a form" page, enter a name for your new form. Since we create it for template *Customer data*, we give the form the same name (1). Select the template *Customer data* from the choice menu and click *Add* (2).

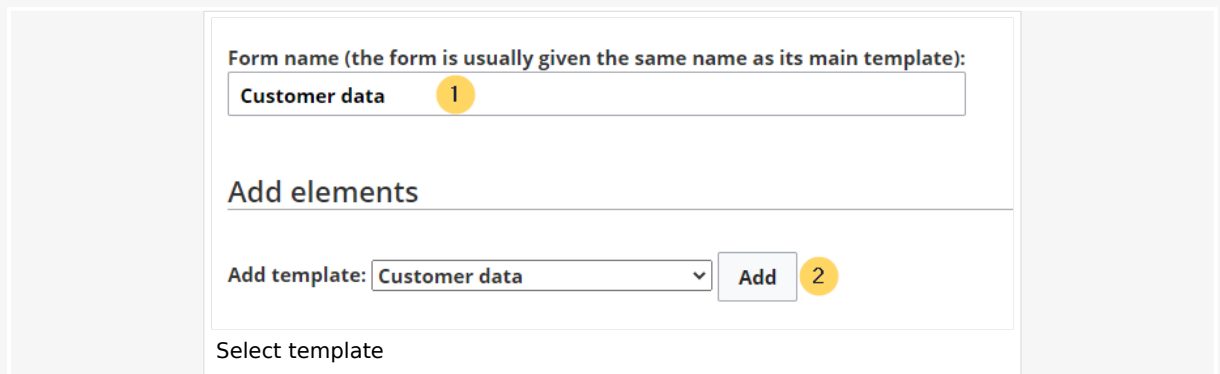

Form name (the form is usually given the same name as its main template):

Customer data 1

Add elements

Add template: Customer data Add 2

Select template

2

The customer data fields from the template *Customer data* are automatically integrated in the form. To facilitate the data entry for the date field, change the input type of the field *firstcontact* to *datepicker*. (1) Then, click *Save page* (2).

Field: firstcontact

This field defines the property Has First contact, of type Date.

Form label:

First contact

 Input type:

datepicker

1

☐ Other parameters

Remove template

Add elements

Add template:

Archive:ServiceCenter Example

 Before:

At end

Add

Add section:

Section name

Before:

At end

Add section

2

Save page

Preview

Selecting the input type

Now the form is available for data entry. It can be found in the namespace *Form*.

Using the form

When we create a new customer page, we can now use the form page to create the page and to automatically include the customer data template in the page. The form page has the name *Form:Customer data*.

1

To create a customer page, enter a page name in the form field (1) and click *Create or edit* (2).

03.05.2025

This document was created with BlueSpice

Page 3 of 13

Customer data

 Last edited 42 minutes ago by MLR

 Watch  No status information

This is the "Customer data" form. To create a page with this form, enter the page name below; if a page with that name already exists, you will be sent to a form to edit that page.

Hallo Welt GmbH 1 Create or edit 2

Create a customer page

2

Enter the customer data (1). You can additionally create some free text (2). Click *Save page* after editing the page (3).

Create Customer data: Hallo Welt GmbH

Location: 1 Regensburg
Contact person: Jane Doe
First contact: 21/12/2020 
Free text: 2

Hallo Welt! was founded to make the technology and concept of Wikipedia applicable for professional usage.

Since 2007 Hallo Welt! builds collaborative platforms of knowledge for organisations – especially solutions for knowledge management, online documentation and quality management.

Summary:

This is a minor edit ☐ Watch this page

Save page Show preview Show changes [Cancel](#)

Dateneingabe während Seitenerstellung

Now you have created a customer page that collects customer data and shows the entered data on the page.

(Pages): [Hallo Welt GmbH](#)

Page Discussion

Customer data

Hallo Welt GmbH

Last edited one hour ago by MLR☆ Watch ⓘ No status information

Location	Regensburg
Contact	Jane Doe
First contact	2020/12/21

Hallo Welt! was founded to make the technology and concept of Wikipedia applicable for professional usage.

Since 2007 Hallo Welt! builds collaborative platforms of knowledge for organisations – especially solutions for knowledge management, online documentation and quality management.

Customer page with semantic template

Note: You can [customize the template style](#) later. First, you should integrate the form with the customer pages.

Next step

As the next step, we add the form edit mode option to pages that include the *Customer data* template.

Edit pages in form edit mode

Related info


- https://www.mediawiki.org/wiki/Extension:Page_Forms/Quick_start_guide Help page for the extension *PageForms*

2.4 Integrating the form edit mode

A [quality version](#) of this page, [approved](#) on 7 January 2021, was based off this revision.


With the page *Special:CreateCategory*, we now connect the category *Customer data* with the form *Customer data*.

This adds a **form edit link** to all pages that use the **template** *Customer data*. Additionally, it makes it possible to list pages that include customer data all throughout the wiki.

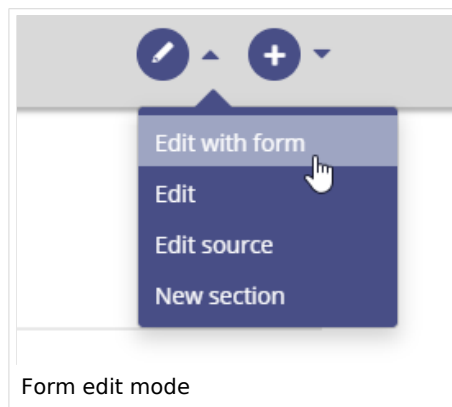

Activating the form edit mode

- 1 Switch again to the page *Special:Special pages*. In the section *Page Forms*, click the link *Create a category*.

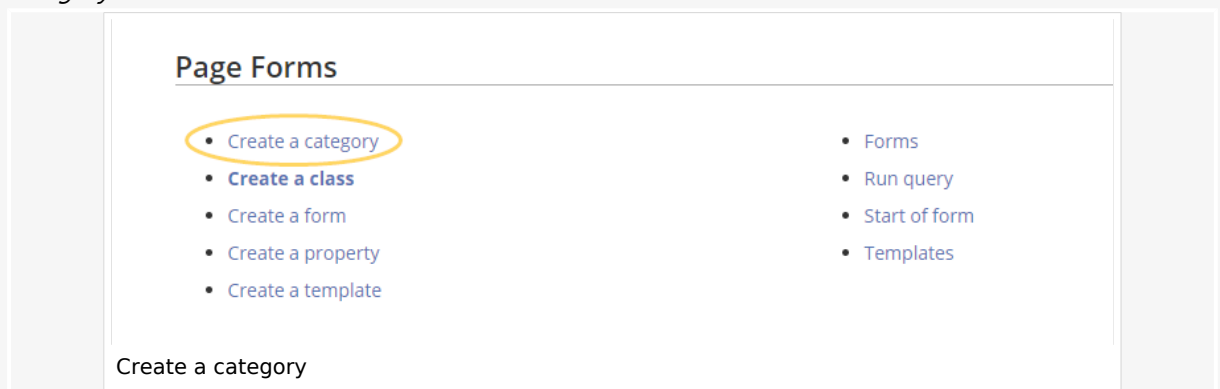

- 2 Enter the category name you chose in step "Create template". In our case, this is the category *Customer data* (1). Select the form *Customer data* (2). Click *Save page* (3).

Category name:

Customer data 1

Default form: Customer data 2

Make this a subcategory of another category (optional):

Save page 3 Preview

Associate category and form

The category page *Customer data* is now associated with the form *Customer data*.

Category: Customer data Page Discussion

No categories assigned

Customer data Help

Last edited one second ago by MLR Watch No status information

Unreviewed pages | Pending changes


This category uses the form [Customer data](#).

Pages in category "Customer data"

- [Hallo Welt GmbH](#)

Category that is associated with a form

As a result, all pages that contain the template *Customer data* now have a form edit link available.

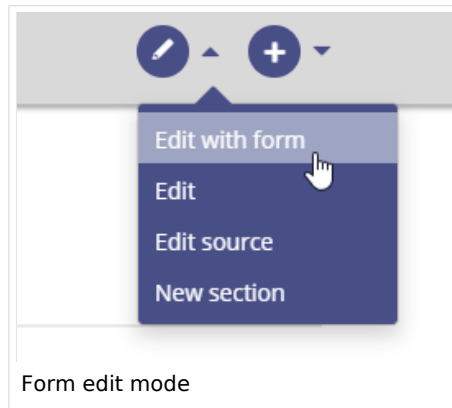

Note: If you do not want to use a category to make the "form edit" option available on a page, you can also associate the form with a namespace or simply add the form reference directly to the template. For more information see [the instructions on mediawiki.org](https://www.mediawiki.org/wiki/Manual:Semantic_MediaWiki/Examples/Customer_data/Form)

Related info

- [Styling the template](#)
- [Query the collected data](#)
- [Naming conventions for semantic elements](#)
- [Video tutorials for Semantic MediaWiki](#)

3 Manual:Semantic MediaWiki/Examples/Customer data /Template styling

A [quality version](#) of this page, [approved](#) on *22 December 2020*, was based off this revision.

By default, a semantic template that was created with the page *Special:CreateTemplate*, is displayed in a basic table format. Each property/value pair is shown in a new table row. The table width adjusts to the table content.

Location	Regensburg
Contact	Jane Doe
First contact	2020/12/21

Hallo Welt! was founded to make the technology and concept of Wikipedia applicable for professional usage.

Since 2007 Hallo Welt! builds collaborative platforms of knowledge for organisations – especially solutions for knowledge management, online documentation and quality management.

Default table of a semantic template

To change the table layout, we can add some styling information to the template.

Adjusting the template styling

To format the table, we create a subpage to the template. It contains the custom template styles. In the following example, we create a variation of the original table with a width of 100%, left-aligned labels and more padding in the table cells.

Location	Regensburg
Contact	Jane Doe
First contact	2020/12/21

Customized table styling

- 1 Create the subpage `styles.css`. For the template `Customer data`, you need to create the page *Template:Customer data/styles.css*.

- 2 To achieve the shown table styling, add the following code to the new *styles.css*.

```
table.mysmwtable {
    width:100%; /*width of the box/
    margin: 0 0 2em 0; /*cell padding*/
    background-color: #f8f9fa; /*background color for the table*/
    color: #222; /*Textfarbe*/
    border: 1px solid #a2a9b1; /*border*/
    border-collapse: collapse; /*border*/
}
table.mysmwtable > tr > th, table.mysmwtable > * > tr > th {
    background-color: #eaecef; /*background color of the label column*/
    text-align: left; /*alignment of the label column*/
    width:25%;/*width of the label column*/
}
table.mysmwtable > tr > td, table.mysmwtable > * > tr > td {
    background-color: #f8f9fa; /*background-color of the second column*/
}
table.mysmwtable > tr > th, table.mysmwtable > tr > td, table.mysmwtable > * >
tr > th, table.mysmwtable > * > tr > td {
```

```
border: 1px solid #a2a9b1; /*border around cells*/
padding: 10px; /*cell padding*/
}
form.createbox table.formtable th {
padding:10px 0; /*distance between form fields*/
}
```

Creating Template:Customer data/styles.css

[Manage TemplateData](#)[Information about TemplateData](#)

You have followed a link to a page that does not exist yet. To create the page, start typing in the box below (see the [help page](#) for more info). If you are here by mistake, click your browser's **back** button.

```
1 table.mysmwtable {
2     width:100%; /*width of the box/
3     margin: 0 0 2em 0; /*cell padding*/
4     background-color: #f8f9fa; /*background color for the table*/
5     color: #222; /*Textfarbe*/
6     border: 1px solid #a2a9b1; /*border*/
7     border-collapse: collapse; /*border*/
8 }
9 table.mysmwtable > tr > th, table.mysmwtable > * > tr > th {
10     background-color: #eaeef0; /*background color of the label column*/
11     text-align: left; /*alignment of the label column*/
12     width:25%;/*width of the label column*/
13 }
14 table.mysmwtable > tr > td, table.mysmwtable > * > tr > td {
15     background-color: #f8f9fa; /*background-color of the second column*/
16 }
17 table.mysmwtable > tr > th, table.mysmwtable > tr > td, table.mysmwtable > * > tr > th, table.mysmwtable > * > tr > td {
18     border: 1px solid #a2a9b1; /*border around cells*/
19     padding: 10px; /*cell padding*/
20 }
```

Summary:

255

☐ Watch this page

Please note that all contributions to BlueSpice Wiki may be edited, altered, or removed by other contributors. If you do not want your writing to be edited mercilessly, then do not submit it here.

You are also promising us that you wrote this yourself, or copied it from a public domain or similar free resource (see [Legal:Copyright](#) for details). **Do not submit copyrighted work without permission!**

Save page

Show preview

Show changes

Cancel

Create a custom table style

Save the page.

3

Now edit the page *Template:Customer data*.

(1) Add the reference to the page *styles.css* at the beginning of the template. You can copy the following tag:

```
<templatestyles src="Customer_data/styles.css" />
```

(2) Change the name of the css-class used in the table from *wikitable mysmwtable*.

Template:Customer data

```
<templatestyles src="Customer data/styles.css" />
```

1

```
<noinclude>
```

```
This is the "Customer data" template.
```

```
It should be called in the following format:
```

```
<pre>
```

```
{{Customer data
```

```
|location=
```

```
|contactperson=
```

```
|firstcontact=
```

```
}}
```

```
</pre>
```

```
Edit the page to see the template text.
```

```
</noinclude><includeonly>
```

```
{| class="mysmwtable"
```

2

```
! Location
```

```
| [[Has location::{{{location|}}}]]
```

```
|-
```

```
! Contact
```

```
| [[Has contact person::{{{contactperson|}}}]]
```

Add style tag to the template

Save the changes.

Now you can see the new table styling..

As a variation, you can also define the background color of the table cells. For example, you can create white cell backgrounds. Change the following lines in your *styles.css*:

```
table.mysmwtable > tr > th, table.mysmwtable > * > tr > th {  
    background-color: white; /*background color of the label column*/  
}
```

sowie

```
table.smwtable > tr > td, table.smwtable > * > tr > td {  
    background-color: white; /*Hintergrundfarbe der Wertespalte*/  
}
```

Im CSS ändern sich also folgende Zeilen:

```
1 table.mysmwtable {
2     width:100%; /*width of the box*/
3     margin: 0 0 2em 0; /*cell padding*/
4     background-color: #f8f9fa; /*background color for the table*/
5     color: #222; /*Textfarbe*/
6     border: 1px solid #a2a9b1; /*border*/
7     border-collapse: collapse; /*border*/
8 }
9 table.mysmwtable > tr > th, table.mysmwtable > * > tr > th {
10     background-color: white; /*background color of the label column*/ 1
11     text-align: left; /*alignment of the label column*/
12     width:25%; /*width of the label column*/
13 }
14 table.mysmwtable > tr > td, table.mysmwtable > * > tr > td {
15     background-color: white; /*background-color of the second column*/ 2
16 }
17 table.mysmwtable > tr > th, table.mysmwtable > tr > td, table.mysmwtable > * > tr > th, table.mysmwtable > * > tr > td {
18     border: 1px solid #a2a9b1; /*border around cells*/
19     padding: 10px; /*cell padding*/
20 }
```

White cell backgrounds

Die Zellhintergründe werden entsprechend angepasst.

Location	Regensburg
Contact	Jane Doe
First contact	2020/12/21

Display of white table backgrounds

Infobox

You can also format the table as an infobox. An infobox is floating to the left or right of the text flow.

Hallo Welt! was founded to make the technology and concept of Wikipedia applicable for professional usage.

Since 2007 Hallo Welt! builds collaborative platforms of knowledge for organisations – especially solutions for knowledge management, online documentation and quality management.

Infobox

Location	Regensburg
Contact	Jane Doe
First contact	2020/12/21

1

Add the following css-code to the page *Template:Customer_data/styles.css* and save the template. Delete any previous styles for the class *.mysmwtable* to avoid any inheritance problems for the styles:

```
table.mysmwtable {
    float:right; /*right-aligned infobox*/
    width:300px; /*width of the box*/
    margin: 0 0 2em 2em; /*cell padding*/
    background-color: #f8f9fa; /*background color for the table*/
}
```

```
color: #222; /*Textfarbe*/
border: 1px solid #a2a9b1; /*border*/
border-collapse: collapse; /*border*/
}
table.mysmwtable > tr > th, table.mysmwtable > * > tr > th {
    background-color: #eaeef0; /*background color of the label column*/
    text-align: left; /*alignment of the label column*/
}

table.mysmwtable > tr > th, table.mysmwtable > tr > td, table.mysmwtable > * > tr
> th, table.mysmwtable > * > tr > td {
    border: 1px solid #a2a9b1; /*border around cells*/
    padding: 0.2em 0.4em; /*cell padding*/
}
form.createbox table.formtable th {
    padding: 10px 0; /*distance between form fields*/
}
```

Tip: If you need different output formats, create separate templates to accomodate the styling. The templates can then use different subpages (styles.css) for each styling.