

## Contents

1. <a href="#">Reference:BlueSpicePageAccess</a> .....	2
2. <a href="#">Manual:Extension/BlueSpicePageAccess</a> .....	3

## Reference:BlueSpicePageAccess

### Extension\>: BlueSpicePageAccess

Overview			
<b>Description:</b>	Controls access on page level		
<b>State:</b>	stable	<b>Dependency:</b>	BlueSpice
<b>Developer:</b>	HalloWelt	<b>License:</b>	GPL-3.0-onlyProperty "BSExtensionInfoLicense" (as page type) with input value "</br>GPL-3.0-only" contains invalid characters or is incomplete and therefore can cause unexpected results during a query or annotation process.
<b>Type:</b>	BlueSpice	<b>Category:</b>	Security
<b>Edition:</b>	BlueSpice free, BlueSpice pro, BlueSpice Farm, BlueSpice Cloud		
<a href="#">View help page</a>			

## Features

**BlueSpicePageAccess** allows only a certain user group access to the page.

The restriction is achieved by inserting the tag *pageaccess* on a page. Access restriction per page is done on a group basis. "Access" here means all actions, including read and edit.

## Technical Information

This information applies to BlueSpice 3 . Technical details for BlueSpice cloud can differ in some cases.

## Requirements

MediaWiki: 1.31

BlueSpiceFoundation: 3.2

## Integrates into

- BlueSpiceVisualEditorConnector

## Special pages

- PageAccess

## Permissions

Name	Description	Role
pageaccess-viewspecialpage	Access to the special page <a href="#">Special:PageAccess</a>	admin, maintenanceadmin, structuremanager

## Configuration

Name	Value
PageAccessBlockableActions	array ( 0 => 'read', 1 => 'edit', 2 => 'delete', 3 => 'move', )

## API Modules

- bs-pageaccess-store

## Hooks

- [BSInsertMagicAjaxGetData](#)
- [BSUsageTrackerRegisterCollectors](#)
- [PageContentSave](#)

## Page access restrictions

A [quality version](#) of this page, [approved](#) on *28 July 2020*, was based off this revision.

**BlueSpicePageAccess** restricts access to a page to specified user groups. It is inserted with the tag *pageaccess*. Access restriction per page is done on a group basis. "Access" here means all actions, including read and edit.

### Contents


<a href="#">1 How to restrict access to a page</a>	4
<a href="#">2 Related info</a>	5

## How to restrict access to a page

Users who have the necessary permissions (by default through the roles *admin*, *maintenanceadmin*, and *structuremanager*) can add the necessary instruction to a page.

### To add this tag with **VisualEditor**:

1. **Position** the cursor at the beginning of your page.
2. **Select** *Insert > Magic word*.
3. **Select** *Page access* in the dialog box.
4. **Click** *Done*.
5. **Add** the groups to the Page access dialog box.
6. **Click** *Insert*.

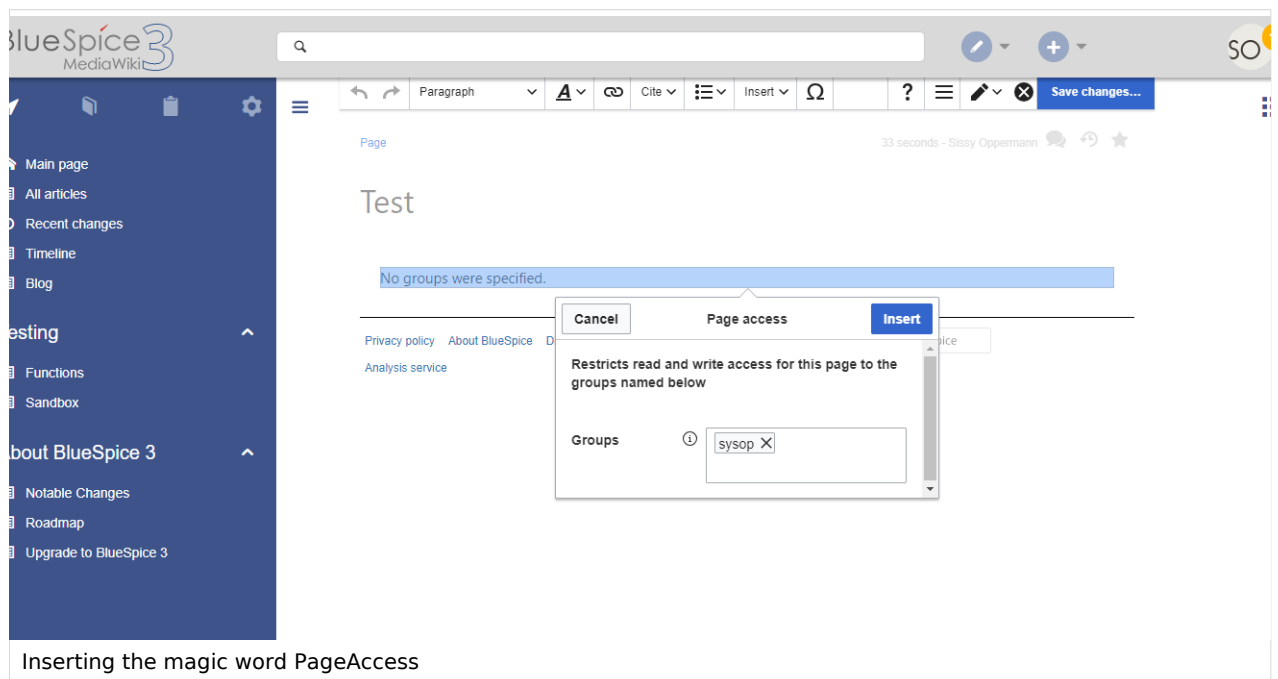

The page now displays an info header that shows the groups that have access to the page.

Access to this page is restricted to the group **sysop**.

In source view, the tag looks like this:

```
<bs:pageaccess groups="sysop" />
```

To add more groups, use commas to separate:

```
<bs:pageaccess groups="sysop,secure1,secure2" />
```

A user can only restrict access to the groups this user belongs to. This is a security feature to prevent users from locking themselves out of a page.

## Related info

---

- [Reference:BlueSpicePageAccess](#)